


ICP-AMAX4-P2-EN Intrusion panel, fr/de/nl/pt

www.boschsecurity.com



BOSCH

Invented for life

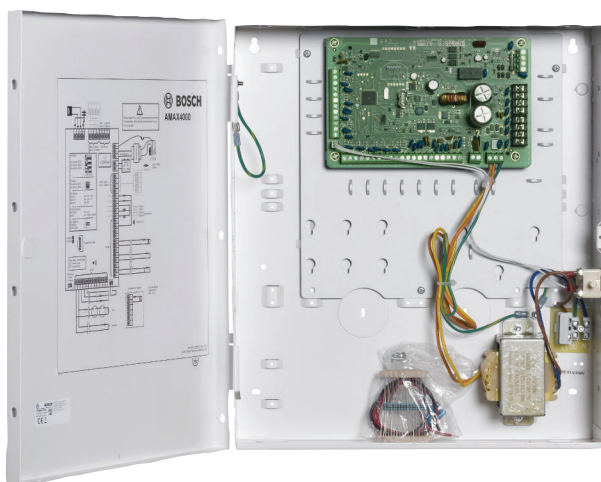


- ▶ 64 zones / 16 areas / 250 user codes
- ▶ On-board voice dialer
- ▶ Macro functionality
- ▶ USB direct connection

This hybrid panel is designed for residential and small to medium-sized businesses. It offers 64 zones and 16 areas and comes with an enclosure and a transformer. An on-board PSTN dialer transmits an alarm via the common telephone network to a phone and / or a communication center while at the same time a voice message is sent to the owner's landline or mobile phone to inform him about an intruder's presence. Commissioning the system is simple and involves minimum programming: the default settings already cover 90 % of the available functionality. Programming can either be done via the AMAX TEXT, LCD and LED keypads or via the programming software (A-Link Plus).

The intrusion system can be used with both RADION wireless peripherals, operating at 433 Mhz and hardwired detectors from Bosch.

System overview

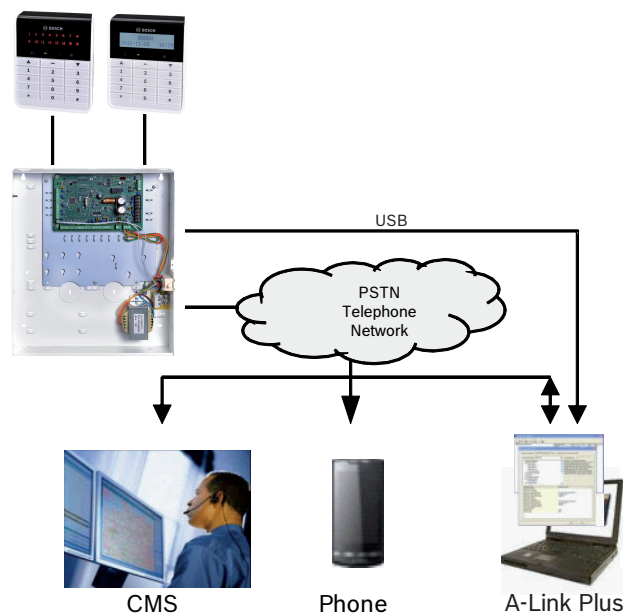

Functions

Basic functions

- Keypad code STAY / AWAY arming
- One button STAY / AWAY arming
- On-board dialer with CID / SIA transmission format. Voice dialer transmits up to 4 recorded messages to landline/mobile phones in case of an alarm. Messages can be recorded with A-Link Plus and sent to the control panel with the remote programming software A-Link Plus
- 16 weekly schedules with the option to add exceptions in the calendar
- 3 programmable macros: several single functions from the keypad are combined to one customer macro function, can be executed by pressing one button
- Remote maintenance operations (e.g. walk test, bypassing)
- Installer can enable the service mode for comfortable programming without having alarms or outputs triggered
- In multi-area set-up (direct and multiple arming), "area status" is displayed
- Area name is displayed on the master or area text keypad
- 4 on-board outputs (two monitored)
- Up to three output event types can be configured for one physical output
- Every zone except zone 1 can be used with four-wire fire detectors
- Any zone can be used for chime mode (door bell)
- Any zone can be used to detect a sensor tamper (DEOL)
- Zones can be bypassed by name
- Test mode for outputs and zones

Optional functions

- Wireless devices (433 MHz) RADION from Bosch
- Zone inputs on extension modules (with DX2010)
- Relay outputs on extension modules (with DX3010)
- Connect outdoor sirens and IP cameras to an optional 8 relay module (DX3010)
- Programming key
- Arming, bypassing, isolating, operating outputs and inquiry with the RSC+ app on mobile devices (with the B426-M or the B450-M with B442 or B443 modules)

Optional alarm transmission

- IP communication with Bosch Conettix IP, SIA DC09 UDP and SIA DC 09 TCP protocols via B426-M and B450-M with B442 or B443 modules
- GPRS communication with Bosch Conettix IP, SIA DC09 UDP and SIA DC 09 TCP protocols via B450-M with B442 or B443 modules

Optional remote programming via A-Link Plus

- IP communication (B426-M and B450-M with B442 or B443 modules)
- GPRS communication (B450-M with B442 or B443 modules)

Communication with Bosch Software Packages

The AMAX system can communicate with the following software packages:

Remote programming software A-Link Plus

The AMAX system can be accessed and programmed via the remote programming software A-Link Plus. All control panel and status information are accessible and an operation of the AMAX panel from a remote location is possible.

A-Link Plus can connect to the AMAX panel via USB, IP or modem.

Compatibility information

Basic

PSTN communicator (integrated)	Formats: Contact ID, SIA DC 03
Magnetic contacts	All magnetic contacts, including recessed, terminal connection, miniature over-head door, and surface mount.
Intrusion detectors	All conventional intrusion detectors, including Blue Line, seismic, PIR, TriTech, photoelectric and TriTech PIR Microwave.
Four-wire smoke detectors	Conventional 12V smoke, heat and photoelectric smoke detectors.

Optional

Zone	DX2010 zone input module
Relays	DX3010 output module
IP communicator	B426-M and B450-M with B442 or B443 modules
GPRS/GSM communicator	B450-M with B442 or B443 modules
Wireless devices	All RADION devices

Assorted literature is available. Refer to the appropriate datasheet, brochure, and installation manuals for additional data.

Availability varies according to sales region.

Certifications and approvals

Region	Regulatory compliance/quality marks	
Germany	VdS	H113018 [AMAX panel 4000 EN, IUI-AMAX4-TEXT, IUI-AMAX3-LED8, IUI-AMAX3-LED16]
Europe	CE	EMC, LVD, RoHS [AMAX panel 4000 EN, AMAX panel 3000 BE]
	CE	AMAX panel 4000, AMAX Panel 3000-BE

Region	Regulatory compliance/quality marks	
Belgium	INCERT	B-509-0063 B [ICP-AMAX4-P2, ICP-AMAX4-P3, ICP-AMAX3-P2]
Sweden	SBSC	13-387 [AMAX panel 4000 EN]
France	AFNOR	1223400001 [ICP-AMAX4-P2-EN, ICP-AMAX4-P3-EN]
	AFNOR	1223400001A2 FR_AFNOR 1223400001A1 [ICP-AMAX4-P2-EN]

Parts included

Quant ity	Component
1	AMAX panel 4000 including integrated PSTN communicator
1	Enclosure
1	Transformer
1	Tamper switch
1	Terminal block for power supply
1	Hardware accessory pack: EOL resistors
1	Operation Manual

Technical specifications

Electrical

Power supply type	EN = A
-------------------	--------

Transformer

Transformer input in VAC	230
Transformer output in VAC	18
Transformer AC power in VA	50
Transformer fuse in mA	1000

AC input

Minimum operating voltage in VDC	195
Maximum operating voltage in VDC	253
Line voltage frequency in Hz	50

DC output

DC output maximum current for all components in mA	2000
DC output maximum current for all components: dependency on battery	<ul style="list-style-type: none"> Battery 7Ah standby 12h (recharge Batt 80% in 72h) = 550mA Battery 7Ah standby 36h + 15min alarm current 500mA (recharge Batt 80% in 72h) = 150mA

- Battery 18 Ah standby 12h (recharge Batt 80% in 72h) = 1500mA
- Battery 18Ah standby 36h (recharge Batt 80% in 24h) = 480mA
- Battery 18Ah standby 36h + 15min alarm current 1000mA (recharge Batt 80% in 24h) = 400mA

Aux 1 / 2 output

Aux 1 / 2 output voltage	+12V / GND
Aux 1 / 2 nominal output voltage under AC line input in VDC	13.8 (+3% / -5%)
Aux 1 / 2 output max. Vpp in mV	675
Aux 1 / 2 output voltage range under AC line input in VDC	13.11 - 14.2
Aux 1 / 2 output current in mA at 25°C	900

Outputs

PO -1 / PO -2 maximum supervised output current in mA	500
PO +3 / PO +4 maximum current in mA (+12V)	750
Watchdog PO -5 maximum current in mA	100

Option bus

Option bus nominal output voltage under AC line input in VDC	13.8 (+3% / -5%)
Option bus output voltage range under AC line input in VDC	13.11 - 14.2
Option bus 1 maximum current in mA at 25°C	900
Option bus 2 maximum current in mA at 25°C	900
Panel PCB maximum quiescent current in mA	100

Battery

Battery type	12 V / 7Ah / 12 V / 18 Ah Bosch IPS-BAT12V-18AH
Low battery condition in VDC	below 11.0
Minimum battery condition in VDC	10.8

Frequency bands of operation	Power level for radio equipment
GSM900	Class 4 (2W) - GPRS Class 33
GSM1800	Class 1 (1W) - GPRS Class 33
UMTS2100	Class 3 (0.25W)

Mechanical

Dimension in cm (H x W x D)	37.5 x 32.2 x 8.8
Weight in g	4700

Panel features

Number of zones	64
Number of on-board zones	16
Number of users	250
Number of events	256 history events, stamped with time, and date 256 EN history events, stamped with time, and date 256 dialer history events, stamped with time, and date
Pin code variations	1000000

Number of devices

Number of keypads	16
Number of DX 2010 modules	6
Number of DX 3010 modules	2
Number of GPRS modules: B450-M with B442 or B443	1
Number of IP modules: B426-M	2 (1 if 1 of the GPRS modules above is connected)
Number of RF receivers	1
Number of RADION RF repeaters	8
Number of RF sensors	64
Number of DSRF RF keyfobs	24
Number of RADION RF keyfobs	128

Zones

Zone 1	2 wire fire zone, single, or dual end-of-line (EOL 2,2K Ω) NC, NO
Zone 2 - 16 COM	15 single or dual end-of-line (EOL 2,2K Ω) NC, NO
Tamper	Enclosure tamper input (does not reduce point capacity)

Option bus

Dimensions in mm	4 wire, Ø 0.6 - 1.2
Maximum cable length in m	200 (panel to last keypad)
Maximum bus length in m	700 (maximum 14 devices, maximum 8 keypads)

Environmental

Minimum operating temperature in °C	-10
Maximum operating temperature in °C	55
Minimum relative humidity in %	10
Maximum relative humidity in %	95
Protection class	IP 30, IK 06

Ordering information

ICP-AMAX4-P2-EN Intrusion panel, fr/de/nl/pt

Language Package 2: French, German, Dutch, Portuguese

Order number

ICP-AMAX4-P2-EN | F.01U.266.841

Asset Key

4235

Vepos

7991

Accessories**IUI-AMAX-LCD8 LCD keypad, 8-zone**

AMAX keypad 2000 D8, 8 zones LCD icon keypad
 Order number Asset Key Vepos
IUI-AMAX-LCD8 | F.01U.216.752

IUI-AMAX3-LED8 LED keypad, 8-zone

AMAX keypad 3000 L8 is a 8 zone LED keypad
 Certification: EN 50131-3 Grade 2
 Order number Asset Key Vepos
IUI-AMAX3-LED8 | F.01U.269.157 4235 7927

IUI-AMAX3-LED16 LED keypad, 16-zone

AMAX keypad 3000 L16 is a 16 zone LED keypad
 Certification: EN 50131-3 Grade 2
 Order number Asset Key Vepos
IUI-AMAX3-LED16 | F.01U.266.843 4235 7933

IUI-AMAX4-TEXT Text keypad

AMAX keypad 4000 T, LCD text keypad, two lines with each 18 characters
 Order number Asset Key Vepos
IUI-AMAX4-TEXT | F.01U.266.838 4235 7998

DX2010 Input expander, 8-zone

Zone expansion module with 8 DEOL zone inputs
 Order number Asset Key Vepos
DX2010 | 4.998.800.180 4011 6980

DX3010 Output expander, 8-relay

Package includes only the DX3010 board
 Order number Asset Key Vepos
DX3010 | 4.998.800.183 4235 7963

AE20EN Enclosure for module w/tamper skirt, EN

AE20EN plastic enclosure for DX2010/DX3010
 Order number Asset Key Vepos
AE20EN | F.01U.277.876

B426-M Ethernet communication module, mobile

Supports Ethernet communication for remote programming and mobile apps on AMAX and Solution Series control panels
 Order number Asset Key Vepos
B426-M | F.01U.332.307 F.01U.386.953 4235 8337

B450-M Plug-in communicator interface, mobile

Supports cellular communication for remote programming and mobile apps on AMAX and Solution Series control panels
 Order number Asset Key Vepos
B450-M | F.01U.332.308 F.01U.387.027 4235 8338

B442 Plug-in cellular module, GPRS

Multi-function cellular communicator that provides IP communication over a (GPRS) cellular network
 Order number Asset Key Vepos
B442 | F.01U.283.090 4235 8330

B443 Plug-in Cellular, HSPA+ (3G+)

Multi-function 3G/4G cellular communicator providing IP communication over a GPRS/EDGE/UMTS/HSPA+ cellular network
 Order number Asset Key Vepos
B443 | F.01U.323.796 4235 8336

ICP-EZPK Programming key

Blue key for transferring configurations to and from Easy Series and AMAX panels
 Order number Asset Key Vepos
ICP-EZPK | F.01U.003.534 4011 7234

ICP-EZRU-0106 ROM UPDATE KEY - EZ V1

Green key for upgrading the panel firmware
 Order number Asset Key Vepos
ICP-EZRU-0106 | F.01U.024.984

RFRC-OPT Wireless option bus interface

A wireless receiver that connects RADION wireless peripherals such as the repeater, as well as detectors and transmitters, to supported Bosch control panels. For use in Europe.
 Order number Asset Key Vepos
RFRC-OPT | F.01U.253.605 4235 9885

Services**EWE-AMAX-IW 12mths wrty ext AMAX**

12 months warranty extension
 Order number Asset Key Vepos
EWE-AMAX-IW | F.01U.352.290

Represented by:

Europe, Middle East, Africa:
 Bosch Security Systems B.V.
 P.O. Box 80002
 5600 JB Eindhoven, The Netherlands
 Phone: + 31 40 2577 284
 emea.securitysystems@bosch.com
 emea.boschsecurity.com

Germany:
 Bosch Sicherheitssysteme GmbH
 Robert-Bosch-Ring 5
 85630 Grasbrunn
 Germany
 www.boschsecurity.com

North America:
 Bosch Security Systems, LLC
 130 Perinton Parkway
 Fairport, New York, 14450, USA
 Phone: +1 800 289 0096
 Fax: +1 585 223 9180
 onlinehelp@us.bosch.com
 www.boschsecurity.us

Asia-Pacific:
 Robert Bosch (SEA) Pte Ltd, Security Systems
 11 Bishan Street 21
 Singapore 573943
 Phone: +65 6571 2808
 Fax: +65 6571 2699
 apr.securitysystems@bosch.com
 www.boschsecurity.asia