

DIVAR network 5000 recorder



Connect this recorder to a maximum of 32 IP cameras that use the latest H265/H264 high-resolution video technology and state-of-the-art compression techniques.

These advanced technologies, coupled with efficient network data transmission, deliver the high security and reliability required for modern surveillance systems. Simultaneous remote or local monitoring, recording, archive and playback functions are guided by simple menu selections and operator commands. The recorders can be installed with a maximum of 4 internal HDDs for video storage. Another option is two HDDs for storage, plus a DVD burner for video export. Use the recorder as a desktop model or in a standard rack mount.

Functions

Latest video compression technology

The DIVAR supports H.264 and H.265 video compression technology. This technology dramatically reduces bandwidth and storage requirements while still delivering superb image and audio quality. Equipped with this newest video technology, DIVAR gives you the full benefits of the latest high-resolution cameras. The proof is in the pixels.

Camera IP support

The recorder supports native camera integration with Bosch IP cameras which provides easy installation, configuration and maintenance options. This allows plug-and-play connectivity as the installer can connect and configure the cameras to the recorder without



- ▶ 32 IP channels with 320 Mbps incoming bandwidth
- ▶ 12 MP IP camera support for view and playback
- ▶ Real time live display for 16 channels @1080p or 4 channels @4k
- ▶ Extended rack-mount unit with advanced connections
- ▶ Separate internet and IP camera networks

having to open every camera individually on a web client. For further configuration 3rd party cameras are supported through the ONVIF Profile S protocol.

Simultaneous record and view

The DIVAR records multiple video and audio signals while simultaneously providing live multi-screen viewing and playback. Comprehensive search and playback functions provide quick recall and viewing of recorded video.

The DIVAR has a real-time display resolution of 1080p for 16 channels simultaneously, or 4K for 4 channels.

PoE+ switch

The recorders with a built-in PoE+ switch can supply power to a maximum of 16 connected cameras. Each camera automatically receives its IP address from the recorder for simple plug-and-play operation.

Simple operation

The DIVAR is very easy to install and use. Simply connect the cameras, apply power, and follow the simple Install Wizard steps for initial setup. The unit can then record automatically with no further intervention required.

DDNS

Bosch offers its customers free Dynamic Domain Name Services (DDNS) for access to network-connected devices via a "friendly" hostname without the need for costly static IP addresses. This makes it easier for uninterrupted access to important video from devices regardless of their location.

Alarms

All models have extensive alarm handling functions and telemetry control. Alarm functions include local inputs and relay outputs, plus motion detection in user-defined areas. If an alarm is detected, the DIVAR can:

- send an e-mail notification and/or FTP push
- sound a buzzer and/or display a warning
- activate local alarm output

Local control

The unit can be easily operated and programmed via the on-screen display menu system using:

- the supplied mouse
- the front panel control keys
- the supplied remote control
- push notification

Inputs and outputs

Video inputs, audio inputs/output, and alarm inputs/outputs are located on the rear panel.

Two video connectors (VGA/HDMI) provide simultaneous output for monitor A for live display (with zoom) and playback (display can be frozen and zoomed). The displays allow full-screen, multi-screen, and sequenced viewing.

A second HDMI connection provides custom camera views for a monitor B.

Network control

Use the PC software or built-in web application via a network for live viewing, playback, and configuration.

Watermark

The DIVAR includes an authenticity check for both local and remote archives, ensuring recording integrity. An Archive Player is provided for playback of secure video files and to check if video is authentic.

Smartphone App

A DIVAR Mobile Viewer app from Bosch for iOS and Android devices is available for:

- live and playback viewing
- recorder configuration
- PTZ control

This means you can watch live video from cameras connected to the DVR from anywhere in the world. You can also control focus, pan, tilt and zoom on PTZ-enabled cameras.

Furthermore, the Android smartphone App supports remote push notifications (no available on iOS). In this way you are automatically notified if an alarm occurs on the device and can take immediate action, even if you are not actively monitoring the system at that moment.

Dome control

The DIVAR can control pan/tilt/zoom (PTZ) equipment using commands sent via IP connection. It also supports Focus, Iris and Aux commands for Bosch cameras.

Panoramic cameras

The DIVAR supports dewarping of Bosch panoramic cameras. The following modes are supported: pan/tilt/zoom (PTZ), panoramic, corridor and quad. Dewarping in the camera can also be selected if the connected IP panoramic camera supports this.

Intuikey keyboard

One Bosch Intuikey keyboard can be connected to this unit to control dome cameras.

RAID software

Units installed with 2 HDDs can support RAID 1 software for mirroring drives. Units installed with 4 HDDs can support RAID 5 software.

Using RAID has a large impact on the system performance. To keep the playback smooth, Bosch recommends to limit the playback to 4 channels.

Regulatory information

Standards	
Alarm	EN 50130-5:2011, Alarm systems - Part 5: Environmental test methods, Class I, Fixed equipment
Lightning protection	To ALL long input / output - and supply-wiring. Alarm inputs and relay output, Video inputs and Outputs, dome-control outputs, power-cable, Audio In/Out. ± 0.5, 1kV line to line, ± 0.5, 1 and 2kV line to earth
EMC + Safety - Europe	
EU Directives	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU (RoHS)
EMC Emission	EN 55032:2012/AC2013, class B
EMC Immunity	EN 50130-4:2011/A1:2014
EMC mains Harmonics	EN 61000-3-2:2014
EMC Mains fluctuations	EN 61000-3-3:2013
LVD Safety	CB scheme + IEC/EN/UL 62368-1:2014/AC:2015
RoHS	EN 50581:2012
EMC + Safety - USA and Canada	
EMC USA	47CFR part 15 (FCC), Class B
Safety USA (UL, cUL)	UL 62368-1, Edition 2, Dec 1, 2014

EMC + Safety - USA and Canada	
Safety Canada	CAN/CSA-C22.2 No. 62368-1
India	
BIS (Bureau of Indian Standards)	BIS registration for external Power adapter (comes / packed with the main product)
Australia	
ACMA EMC	RCM logo on product label

Region	Regulatory compliance/quality marks	
Australia	RCM	DOC SAL Variants
	RCM	DOC SAL
Europe	CE	AR18-20-B004
USA	UL	FCC & UL
	FCC	ST-VS 2016-E-088

Installation/configuration notes

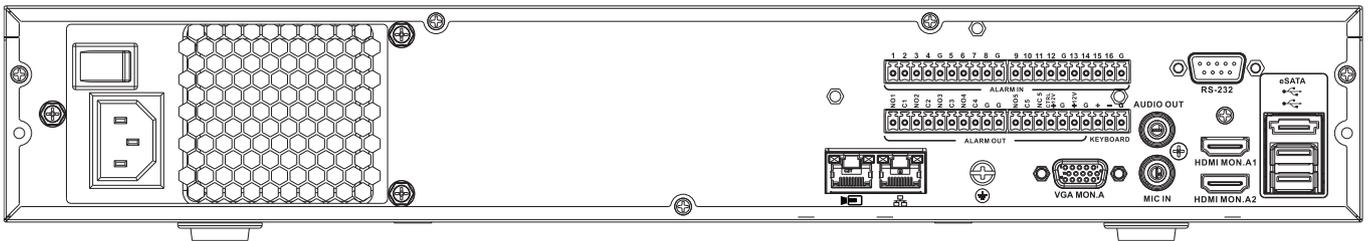


Fig. 1: DIVAR 5000 network back panel (no PoE)



RJ45 video input for max. 32 IP cameras connected via external switch (optional with DHCP configuration)



RJ45 Ethernet connection (10/100/1000Base-T according to IEEE802.3)

VGA MON.A

1 D-SUB (Monitor output)

HDMI MON.A1

1 HDMI (Monitor output in maximum 4k resolution)

HDMI MON.A2

1 HDMI (output for spot monitor that supports live multiscreen); resolution 1080p (1920x1080)

ALARM IN

16 screw terminal inputs, cable diameter AWG26-16 (0.4-1.29 mm)

ALARM OUT

6 screw terminal outputs, cable diameter AWG26-16 (0.4-1.29 mm)

KEYBOARD

Screw terminals, cable diameter AWG26-16 (0.4-1.29 mm)

AUDIO OUT

1 RCA (Audio output)

MIC IN

1 RCA (Audio input)

RS-232

DB9 male, 9-pin D-type (for service)



Two USB (3.0) connectors for mouse or USB memory device; one USB (2.0) also on front panel

eSATA


For backup/memory device

Power input with On/Off switch

100~240 VAC, 50-60 Hz, 1.9 A, 75 W



Ground connection

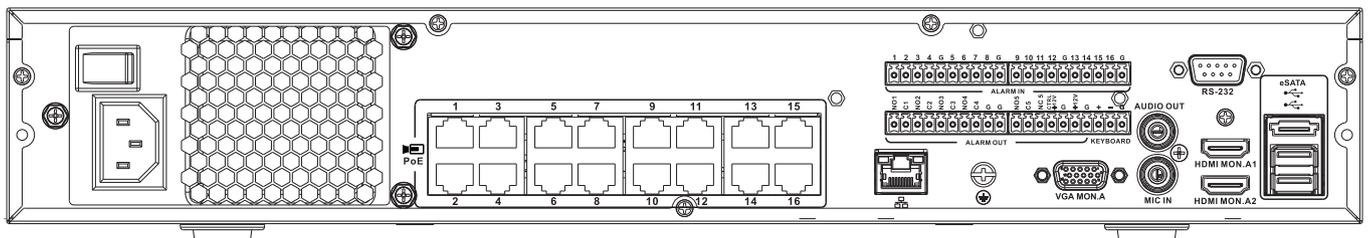

DIVAR 5000 network back panel (16 PoE)



16 RJ45 ports (200 W; max. 25.5 W per port) for connecting max. 16 PoE cameras connected with DHCP configuration (max. 32 IP cameras)



RJ45 Ethernet connection (10/100/1000Base-T according to IEEE802.3)

VGA MON.A

1 D-SUB (Monitor output)

HDMI MON.A1

1 HDMI (Monitor output in maximum 4k resolution)

HDMI MON.A2

1 HDMI (output for spot monitor that supports live multiscreen); resolution 1080p (1920x1080)

ALARM IN

16 screw terminal inputs, cable diameter AWG26-16 (0.4-1.29 mm)

ALARM OUT

6 screw terminal outputs, cable diameter AWG26-16 (0.4-1.29 mm)

KEYBOARD

Screw terminals, cable diameter AWG26-16 (0.4-1.29 mm)

AUDIO OUT

1 RCA (Audio output)

MIC IN

1 RCA (Audio input)

RS-232

DB9 male, 9-pin D-type



Two USB (3.0) connectors for mouse or USB memory device; one USB (2.0) also on front panel

eSATA

For backup/memory device

Power input with On/Off switch

100~240 VAC, 50-60 Hz, 5 A, 350 W



Ground connection

Technical specifications

Power	
AC input (without PoE)	100-240 VAC; 50-60 Hz; 1.9 A
AC input (with PoE)	100-240 VAC; 50-60 Hz; 5 A
RTC battery on main PCB	Lithium CR2032, 3 VDC
Maximum main power consumption (no HDD)	8.7 W without PoE 15.2 W with PoE
Maximum power consumption of PoE+ switch	185 W

Maximum power consumption (per PoE+ port)	25.5 W
-------------------------------------------	--------

Mechanical

Dimensions (WxDxH)	440 x 408 x 76 mm (17.3 x 16.1 x 3.0 in)
--------------------	------------------------------------------

Weight without PoE (excluding HDDs and DVD)	6.27 kg (13.8 lb) approx.
---------------------------------------------	---------------------------

Weight with PoE switch (excluding HDDs and DVD)	6.37 kg (14.0 lb) approx.
-------------------------------------------------	---------------------------

Environmental

Operating temperature (incl. HDD(s) and DVD)	+0°C to +40°C (+32°F to +104°F)
----------------------------------------------	---------------------------------

Storage temperature	-40°C to +70°C (-40°F to +158°F)
---------------------	----------------------------------

Operating humidity	<93% non-condensing
--------------------	---------------------

Storage humidity	<95% non-condensing
------------------	---------------------

Video storage

Internal (option)	Max. 4 SATA HDD or 2 SATA HDD + 1 DVD (R/RW)
	Max. capacity per HDD: 6 TB
	Max. supported speed per HDD: 6 Gb/s

External (option)	eSATA-connected storage device
-------------------	--------------------------------

Alarms and detections

Motion detection set by camera	Essential or Intelligent Video Analytics (IVA), Motion +
--------------------------------	----------------------------------------------------------

Alarm activations	Video loss, motion detection, input alarm, system alarm
-------------------	---------------------------------------------------------

Events triggered by alarm	Recording, PTZ movement, alarm out, email, buzzer, screen message, Mon A and B activated, mobile push notification
---------------------------	--------------------------------------------------------------------------------------------------------------------

Inputs	16 inputs configurable NO/NC, max. input voltage 12 VDC +/-10%
--------	----------------------------------------------------------------

Outputs	5 relay outputs, 1 open collector
---------	-----------------------------------

Relay contact	Max. rated, 30 VDC, 2 A continuous or 125 VAC, 1 A (activated)
Exporting	
DVD (optional)	Built-in DVD+R/RW writer
USB	Flash memory or external HDD (FAT32)
Network	Web Client software or Video Client
eSATA	External drive

Playback	
Multi-channel	Simultaneous 1/4/8/16 channels
Mode	Forward, reverse, slow play, fast play, frame-by-frame
Search	Time, channel, type, smart
Network	Video Client, Web client, App
Restrict	Restrict video by user rights for viewing
Protection	Protect video against overwriting
Retention time	Automatically delete recordings after 1 to 365 days

Recording	
Decoding compression	H.265/H.264/MJPEG
Speed	Max. 60 IPS per channel, configurable
Bit rate	16 kbps to 24 Mbps per channel
Record interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec
Mode	Manual, Scheduled (regular, motion detection, alarm), Stop
Resolution IP camera	12MP, 8MP, 6MP, 5MP, 3MP, 1.3MP, 1080p, 720p

Network control	
Ethernet	RJ45 port (10/100/1000 Mbps)
PC software	Video Client, Web client
APPs	iPhone, Android

Network control	
User access	Maximum 128 users. Bosch advises a maximum of 4 simultaneous connections. More connections can cause performance limitations.
Protocols	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS/DDNS, IP Filter, PPPoE, FTP

Video performance	
Maximum IP camera channels	32
Maximum incoming bandwidth	320 Mbps
Maximum recording bandwidth	320 Mbps
Maximum transmission bandwidth	320 Mbps

Display	
Resolution	3840×2160, 1920×1080, 1280×1024, 1280×720, 1024×768
OSD	Camera title, Time, Video loss, Motion detection, Recording, PTZ

Audio	
MIC Input	1 channel (via RCA) 200 to 3000 mV, 10 kOhm
Output	1 channel (via RCA) 200 to 3000 mV, 5 kOhm
Direction	Bidirectional (audio input and output connected via device)

Ordering information

DRN-5532-400N00 Recorder 32ch, 1.5U, no HDD

High-resolution recorder for network surveillance systems.

Recorder 32ch 1.5U w/o HDD

Order number **DRN-5532-400N00 | F.01U.321.921**

DRN-5532-400N16 Recorder 32ch, 16PoE, 1.5U, no HDD

High-resolution recorder for network surveillance systems.

32 IP camera channels

16-port PoE switch

Order number **DRN-5532-400N16 | F.01U.321.922**

DRN-5532-414N00 Recorder 32ch 1.5U 1x4TB

High-resolution recorder for network surveillance systems.

32 IP camera channels

1 HDD (4 TB)

Order number **DRN-5532-414N00 | F.01U.329.383**

DRN-5532-214D00 Recorder 32ch 1.5U 1x4TB DVD

High-resolution recorder for network surveillance systems.

32 IP camera channels

1 HDD (4 TB); 1 DVD

Order number **DRN-5532-214D00 | F.01U.329.384**

DRN-5532-414N16 Recorder 32ch 1.5U 1x4TB 16PoE

High-resolution recorder for network surveillance systems.

32 IP camera channels

16-port PoE switch

1 HDD (4 TB)

Order number **DRN-5532-414N16 | F.01U.329.385**

DRN-5532-214D16 Recorder 32ch 1.5U 1x4TB 16PoE DVD

High-resolution recorder for network surveillance systems.

32 IP camera channels

16-port PoE switch

1 HDD (4 TB); 1 DVD

Order number **DRN-5532-214D16 | F.01U.329.386**

Accessories**DVR-XS200-A HDD expansion 2TB**

Storage expansion kit. 2 TB

Order number **DVR-XS200-A | F.01U.302.620**

F.01U.169.674

DVR-XS300-A HDD expansion 3TB

Storage expansion kit. 3 TB

Order number **DVR-XS300-A | F.01U.302.621**

F.01U.285.185

DVR-XS400-A HDD expansion 4TB

Storage expansion kit. 4 TB

Order number **DVR-XS400-A | F.01U.302.657**

DVR-XS600-A HDD expansion 6TB

Storage expansion kit. 6 TB

Order number **DVR-XS600-A | F.01U.324.396**

DVR-XS-DVD-B DVD writer expansion B

DVD writer Expansion kit B

Order number **DVR-XS-DVD-B | F.01U.328.077**

Services**EWE-DIP5BS-IW 12 mths wrty ext DIVAR 5000 w/out HDD**

12 months warranty extension

Order number **EWE-DIP5BS-IW | F.01U.346.378**

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Tel.: +49 (0)89 6290 0
Fax: +49 (0)89 6290 1020
de.securitysystems@bosch.com
www.boschsecurity.com

North America:
Bosch Security Systems, LLC
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com