

FLM-420-I8R1-S Octo-input Interface Module with Relay

www.boschsecurity.com




BOSCH
Invented for life



- ▶ Individually selectable monitoring functions (EOL or contact) for the eight inputs each
- ▶ Maximum switching capacity 2 A / 30 V DC or 0.5 A / 42.4 V AC
- ▶ Maintains LSN loop functions in the event of wire interruption or short-circuit thanks to two integrated isolators
- ▶ Easy wiring thanks to pluggable terminal blocks

The FLM-420-I8R1-S Octo-input Interface Module with Relay allows the monitoring of up to eight inputs. Additionally, it features a change-over contact relay for providing a potential-free output contact. It is a 2-wire LSN element. When connected to the fire panels FPA-5000 and FPA-1200, the interface module offers the enhanced functionality of LSN improved technology.

- Standby
- Triggering in the event of a short circuit
- Triggering in the event of line interruption.



Functions

Monitoring functions of the inputs

The FLM-420-I8R1-S Octo-input Interface Module provides two monitoring functions:

1. Monitoring of a line by an EOL resistor
2. Monitoring of a potential-free contact

The monitoring functions of the eight inputs can be selected individually by setting the corresponding addresses.

Line monitoring with EOL resistor

The monitoring with EOL resistor can be activated individually for each of the inputs. The EOL resistor has a standard resistance of 3.9 kΩ.


The interface module detects

Position	Description
R_{Σ}	Overall line resistance with $R_{\Sigma} = R_{L/2} + R_{L/2} + R_{EOL}$
$R_{L/2}$	Line resistance

The following line conditions will be reliably detected if the overall line resistance is within the specified range:

Line condition	Overall line resistance R_{Σ}
Standby	1500 Ω to 6000 Ω
Short circuit	< 800 Ω
Interruption	> 12 000 Ω

Contact monitoring



The interface module evaluates the operating conditions "open" or "closed". The normal operating condition can be programmed for each input. Contact monitoring has a pulse intensity of 8 mA.

Change-over contact relay

The maximum contact load (resistive load) is 2 A / 30 V DC or 0.5 A / 42.4 V AC.

Address switches

The addresses of the interface modules are set by rotary switches.

In case of a connection to the fire panels FPA-5000 and FPA-1200 (improved version LSN mode), the operator can select automatic or manual addressing with or without auto-detection. In LSN mode classic, connection to the fire panels BZ 500 LSN, UEZ 2000 LSN and UGM 2020 is possible.

Address (A)	Operating mode
0 0 0	Loop/stub in LSN improved version mode with automatic addressing (T-taps not possible)
0 0 1 - 2 5 4	Loop/stub/T-taps in LSN improved version mode with manual addressing
CL 0 0	Loop/stub in LSN classic mode

LSN features

Integrated isolators ensure that function is maintained in the event of a short circuit or line interruption in the LSN loop. A fault indication is sent to the fire panel.

Features of LSN improved version


The product have the following features of the improved LSN technology:

- Flexible network structures including T-tapping without additional elements
- Up to 254 LSN improved elements per loop or stub line
- Downwards compatible with existing LSN systems and control panels.

Certifications and approvals

Region	Certification	
Germany	VdS	G 208184 FLM-420-I8R1-S
Europe	CE	FLM-420-I8R1-S
	CPD	0786-CPD-20560 FLM-420-I8R1-S
Ukraine	MOE	UA1.016.0070265-11 FLM-420-I8R1-S

Installation/configuration notes

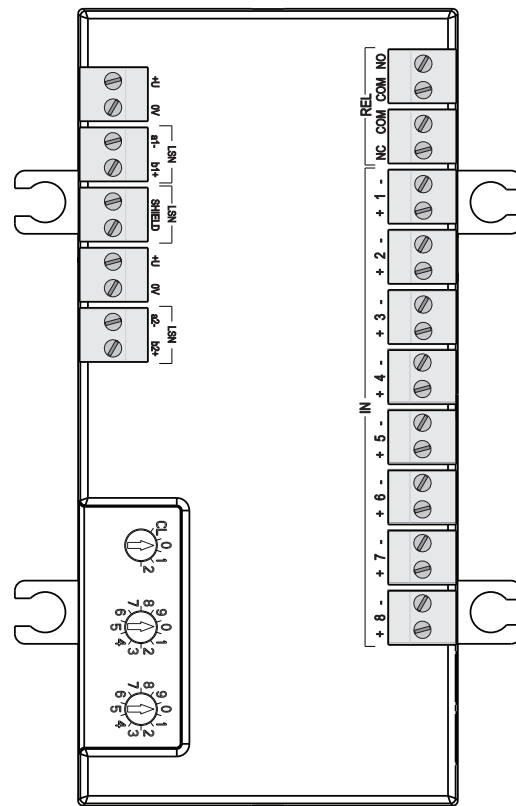

Description	Connection
+U 0V	Auxiliary power supply (support points to loop through)
LSN a1- b1+	LSN incoming
LSN SHIELD	Cable shielding
+U 0V	Auxiliary power supply (support points to loop through)
LSN a2- b2+	LSN outgoing
IN 1 ... 8: + -	Input 1 to input 8
REL NC COM COM NO	Change-over relay (NC contact / COM, COM / NO contact)

- Can be connected to the fire panels FPA-5000 and FPA-1200 and the classic LSN control panels BZ 500 LSN, UEZ 2000 LSN and UGM 2020.
- Programming is done with the programming software of the fire panel.
- The LSN connection is established by the two wires of the LSN line.
- The activation of the inputs IN 1...8 has to be carried out electrically isolated from LSN (e. g. with relay contact, pushbutton, etc.).
- The inputs must have a minimum activation time of 3.2 s.

- The maximum cable length of all inputs connected to the loop or stub is 500 m in total. Additionally, all outputs which are not electrically isolated from LSN must be included in the total line length calculation (e.g. peripherals connected via C points). With UEZ 2000 LSN and UGM 2020, the limitation to 500 m applies to each Network Processing Converter (NVU).
- The interface module has terminals blocks to allow a second pair of wires to be looped through to an auxiliary power supply.
- The cables are fed through rubber bushings or PG cable glands.
- The pluggable terminal blocks allow for an easy wiring even if the interface module is built in.
- Use included spacers when mounting on uneven surface.
- For a fire system operation according to EN 54-2, the interface modules used for the activation of fire protection equipment and whose outputs are not monitored, must be installed directly next to or within the device which shall be activated.
- In order to comply with EN50130-4:2011, shielded cable is required for the installation. The shielded cable needs to be applied for:
 - all loops and stubs which are equipped with one or more modules.
 - all inputs which are connected on the module
 The cable shield wire for the LSN cable has to be connected properly according LSN specifications.

Parts included

Type	Qty.	Component
FLM-420-I8R1-S	1	Octo-input Interface Module with Relay, in housing for surface mounting

Technical specifications

Electrical

LSN input voltage (V DC)	15 ... 33
Max. current consumption from LSN (mA)	5.5
Inputs, independent	8
Line monitoring: EOL resistor, nominal (kΩ) Detected line conditions (Ω) with overall line resistance $R_{\Sigma} = R_{L/1} + R_{L/2} + R_{EOL}$	3.9 Standby: 1500 ... 6000 Interruption: > 12000 Short circuit: < 800
Contact monitoring: Max. current consumption (mA)	8
Min. activation time of the inputs IN 1...8 (s)	3.2
Change-over relay, low voltage	NC / COM, COM / NO
Contact load: Max. switching capacity (A / V DC; A / V AC) Min. switching capacity (mA / mV DC; mA / mV AC) Max. frequency (Hz)	2 / 30; 0.5 / 42.4 0.01 / 10; 0.01 / 10 100

Mechanical

Connections	Screw terminals
Rotary switches, number	3
Weight, without/with packing (g)	480 / 800
Dimensions W x H x D (mm)	140 x 200 x 48
Wire gauge (mm ²)	0.6...3.3
Housing material, housing color (RAL)	ABS+PC-FR, RAL 9003

Environmental

Operating temperature (°C)	-20 ...+65
Storage temperature (°C)	-25 ...+80
Rel. humidity (%), non-condensing	< 96 %
Class of equipment (IEC 60950)	III
Degree of protection (IEC 60529)	IP 54

System limits

Max. cable length, not electrically isolated from LSN in total (m)	500
--	-----

Ordering information

FLM-420-I8R1-S Octo-input Interface Module with Relay

2-wire LSN element, allows the monitoring of up to eight inputs, with a change-over contact relay for providing a potential-free output contact, in housing for surface mounting

Order number **FLM-420-I8R1-S**

Represented by:

North America:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:
Bosch (Shanghai) Security Systems Ltd.
203 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

Latin America and Caribbean:
Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com