

ICP-AMAX2-P4-EN Intrusion panel, IT/EL

www.boschsecurity.com




BOSCH
Invented for life



- ▶ 8 hardwired zones / 2 areas / 64 user codes
- ▶ On-board voice dialer
- ▶ Macro functionality
- ▶ USB direct connection

This panel is designed for residential and small to medium-sized businesses. It offers 8 zones and 2 areas and comes with an enclosure and a transformer. An on-board PSTN dialer transmits an alarm via the common telephone network to a phone and / or a communication center while at the same time a voice message is sent to the owner's landline or mobile phone to inform him about an intruder's presence. Commissioning the system is simple and involves minimum programming: the default settings already cover 90 % of the available functionality. Programming can either be done via the AMAX TEXT, LCD and LED keypads or via the programming software (A-Link Plus). The intrusion system can be used with hardwired detectors from Bosch.

System overview

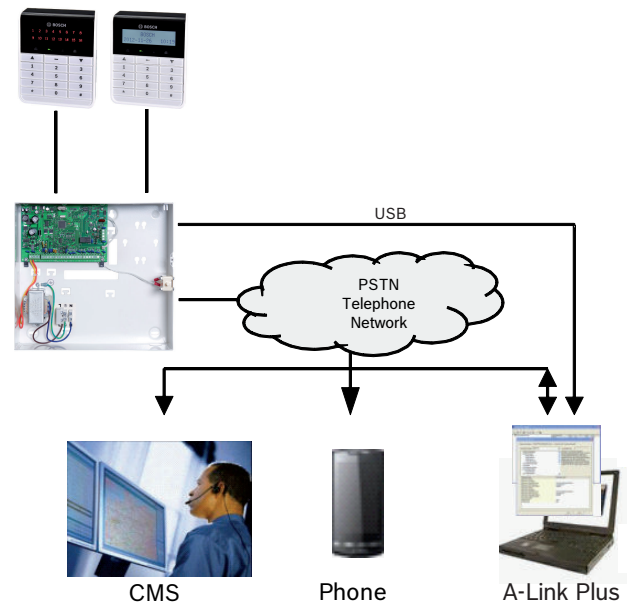

Functions

Basic functions

- Keypad code STAY / AWAY arming
- One button STAY / AWAY arming

- On-board dialer with CID / SIA transmission format. Voice dialer transmits up to 4 recorded messages to landline/mobile phones in case of an alarm. Messages can be recorded with A-Link Plus and sent to the control panel with the remote programming software A-Link Plus
- 16 weekly schedules with the option to add exceptions in the calendar
- 3 programmable macros: several single functions from the keypad are combined to one customer macro function, can be executed by pressing one button
- Remote maintenance operations (e.g. walk test, bypassing)
- Installer can enable the service mode for comfortable programming without having alarms or outputs triggered
- In multi-area set-up (direct and multiple arming), "area status" is displayed
- Area name is displayed on the master or area text keypad
- 4 on-board outputs (two monitored)
- Up to three output event types can be configured for one physical output
- Every zone except zone 1 can be used with four-wire fire detectors
- Any zone can be used for chime mode (door bell)
- Any zone can be used to detect a sensor tamper (DEOL)
- Zones can be bypassed by name
- Test mode for outputs and zones

Optional functions

- Relay outputs on Extension module (with DX3010)
- Connect outdoor sirens and IP cameras to an optional 8 relay module (DX3010)
- Programming key
- Arming, bypassing, isolating, operating outputs and inquiry with the RSC+ app on mobile devices (with the B426-M or the B450-M with B442 or B443 modules)

Optional alarm transmission

- IP communication with Bosch Conettix IP, SIA DC09 UDP and SIA DC 09 TCP protocols via B426-M and B450-M with B442 or B443 modules
- GPRS communication with Bosch Conettix IP, SIA DC09 UDP and SIA DC 09 TCP protocols via B450-M with B442 or B443 modules

Optional remote programming via A-Link Plus

- IP communication (B426-M and B450-M with B442 or B443 modules)
- GPRS communication (B450-M with B442 or B443 modules)

Communication with Bosch Software Packages

The AMAX system can communicate with the following software packages:

Remote programming software A-Link Plus

The AMAX system can be accessed and programmed via the remote programming software A-Link Plus. All control panel and status information are accessible and an operation of the AMAX panel from a remote

location is possible.

A-Link Plus can connect to the AMAX panel via USB, IP or modem.

Compatibility information

| Basic | |
|--------------------------------|--|
| PSTN communicator (integrated) | Formats: Contact ID, SIA DC 03 |
| Magnetic contacts | All magnetic contacts, including recessed, terminal connection, miniature over-head door, and surface mount. |
| Intrusion detectors | All conventional intrusion detectors, including Blue Line, seismic, PIR, TriTech, photoelectric and TriTech PIR Microwave. |
| Four-wire smoke detectors | Conventional 12V smoke, heat and photoelectric smoke detectors. |
| Optional | |
| Relays | DX3010 output module |
| IP communicator | B426-M and B450-M with B442 or B443 modules |
| GPRS/GSM communicator | B450-M with B442 or B443 modules |

Assorted literature is available. Refer to the appropriate datasheet, brochure, and installation manuals for additional data.

Availability varies according to sales region.

Certifications and approvals

| Region | Regulatory compliance/quality marks | |
|--------|-------------------------------------|---|
| Europe | CE | AMAX panel 2100, AMAX panel 3000 |
| | EN50131 | EN-ST-000166 ICP-AMAX2-P2-EN, ICP-AMAX2-P3-EN, ICP-AMAX2-P4-EN, ICP-AMAX3-P2-EN, ICP-AMAX3-P3-EN, ICP-AMAX3-P4-EN |

Parts included

| Quantity | Component |
|----------|--|
| 1 | AMAX panel 2100 including integrated PSTN communicator |
| 1 | Enclosure |
| 1 | Transformer |
| 1 | Tamper switch |
| 1 | Terminal block for power supply |

| Quantity | Component |
|----------|--|
| 1 | Hardware accessory pack: EOL resistors |
| 1 | Operation Manual |

Technical specifications

Electrical

| | |
|-------------------|--------|
| Power supply type | EN = A |
|-------------------|--------|

Transformer

| | |
|----------------------------|-----|
| Transformer input in VAC | 230 |
| Transformer output in VAC | 18 |
| Transformer AC power in VA | 20 |
| Transformer fuse in mA | 500 |

AC input

| | |
|----------------------------------|-----|
| Minimum operating voltage in VDC | 195 |
| Maximum operating voltage in VDC | 253 |
| Line voltage frequency in Hz | 50 |

DC output

| | |
|---|--|
| DC output maximum current for all components in mA | 1100 |
| DC output maximum current for all components: dependency on battery | <ul style="list-style-type: none"> Battery 7Ah standby 12h (recharge Batt 80% in 72h) = 550mA Battery 7Ah standby 36h + 15min alarm current 500mA (recharge Batt 80% in 72h) = 150mA |

Aux 1 / 2 output

| | |
|---|------------------|
| Aux 1 / 2 output voltage | +12V / GND |
| Aux 1 / 2 nominal output voltage under AC line input in VDC | 13.8 (+3% / -5%) |
| Aux 1 / 2 output max. Vpp in mV | 675 |
| Aux 1 / 2 output voltage range under AC line input in VDC | 12.82 - 13.9 |
| Aux 1 / 2 output current in mA at 25°C | 500 |

Outputs

| | |
|---|-----|
| PO -1 / PO -2 maximum supervised output current in mA | 500 |
| PO -3 maximum current in mA | 100 |

Option bus

| | |
|--|------------------|
| Option bus nominal output voltage under AC line input in VDC | 13.8 (+3% / -5%) |
| Option bus output voltage range under AC line input in VDC | 13.11 - 14.2 |
| Option bus 1 maximum current in mA at 25°C | 500 |
| Panel PCB maximum quiescent current in mA | 100 |

Battery

| | |
|----------------------------------|----------------------------|
| Battery type | 12 V / 7 Ah Bosch D 126 |
| Low battery condition in VDC | below 11.0 |
| Minimum battery condition in VDC | 10.8 |

Frequency bands of operation

Power level for radio equipment

| | |
|----------|------------------------------|
| GSM900 | Class 4 (2W) - GPRS Class 33 |
| GSM1800 | Class 1 (1W) - GPRS Class 33 |
| UMTS2100 | Class 3 (0.25W) |

Mechanical

| | |
|-----------------------------|--------------------|
| Dimension in cm (H x W x D) | 26.0 x 28.0 x 8.35 |
| Weight in g | 1950 |

Panel features

| | |
|--------------------------|---|
| Number of zones | 8 |
| Number of on-board zones | 8 |
| Number of users | 64 |
| Number of events | 256 history events, stamped with time, and date 256 EN history events, stamped with time, and date 256 dialer history events, stamped with time, and date |
| Pin code variations | 1000000 |

Number of devices

| | |
|--|---|
| Number of keypads | 4 |
| Number of DX 3010 modules | 1 |
| Number of GPRS modules: B450-M with B442 or B443 | 1 |
| Number of IP modules: B426-M | 2 (1 if 1 of the GPRS modules above is connected) |

Zones

| | |
|-----------------|---|
| Zone 1 | Single or dual end-of-line (EOL 2,2K Ω) NC, NO |
| Zone 2 – 16 COM | 7 Single or dual end-of-line (EOL 2,2K Ω) NC, NO |
| Tamper | Enclosure tamper input (does not reduce point capacity) |

Option bus

| | |
|---------------------------|---|
| Dimensions in mm | 4 wire, \varnothing 0.6 – 1.2 |
| Maximum cable length in m | 200 (panel to last keypad) |
| Maximum bus length in m | 700 (maximum 14 devices, maximum 8 keypads) |

Environmental

| | |
|-------------------------------------|--------------|
| Minimum operating temperature in °C | -10 |
| Maximum operating temperature in °C | 55 |
| Minimum relative humidity in % | 10 |
| Maximum relative humidity in % | 95 |
| Protection class | IP 30, IK 06 |

Ordering information**ICP-AMAX2-P4-EN Intrusion panel, IT/EL**

Language Package 4: Italian, Greek

Order number **ICP-AMAX2-P4-EN****Accessories****IUI-AMAX-LCD8 LCD keypad, 8-zone**

AMAX keypad 2000 D8, 8 zones LCD icon keypad

Order number **IUI-AMAX-LCD8****IUI-AMAX3-LED8 LED keypad, 8-zone**

AMAX keypad 3000 L8 is a 8 zone LED keypad

Certification: EN 50131-3 Grade 2

Order number **IUI-AMAX3-LED8****IUI-AMAX3-LED16 LED keypad, 16-zone**

AMAX keypad 3000 L16 is a 16 zone LED keypad

Certification: EN 50131-3 Grade 2

Order number **IUI-AMAX3-LED16****IUI-AMAX4-TEXT Text keypad**

AMAX keypad 4000 T, LCD text keypad, two lines with each 18 characters

Order number **IUI-AMAX4-TEXT****ICP-AMAX2-PCBP4 PCB board, en/fr/es/pt**

Mainboard for AMAX panel 2100

Language package 4: English, French, Spanish, Portuguese

Order number **ICP-AMAX2-PCBP4****DX3010 Output expander, 8-relay**

Package includes only the DX3010 board

Order number **DX3010****AE20EN Enclosure for module w/tamper skirt, EN**

AE20EN plastic enclosure for DX2010/DX3010

Order number **AE20EN****B426-M Ethernet communication module, mobile**

Supports Ethernet communication for remote programming and mobile apps on AMAX and Solution Series control panels

Order number **B426-M****B450-M Plug-in communicator interface, mobile**

Supports cellular communication for remote programming and mobile apps on AMAX and Solution Series control panels

Order number **B450-M****B442 Plug-in cellular module, GPRS**

Multi-function cellular communicator that provides IP communication over a (GPRS) cellular network

Order number **B442****B443 Plug-in Cellular, HSPA+ (3G+)**

Multi-function 3G/4G cellular communicator providing IP communication over a GPRS/EDGE/UMTS/HSPA+ cellular network

Order number **B443****ICP-EZPK Programming key**

Blue key for transferring configurations to and from Easy Series and AMAX panels

Order number **ICP-EZPK****ICP-EZRU-0106 ROM UPDATE KEY - EZ V1**

Green key for upgrading the panel firmware

Order number **ICP-EZRU-0106****Represented by:****Europe, Middle East, Africa:**

Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:

Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com

North America:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.us

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia