


ET-1010 Vandal-resistant Speakers

www.boschsecurity.com



BOSCH
Invented for life

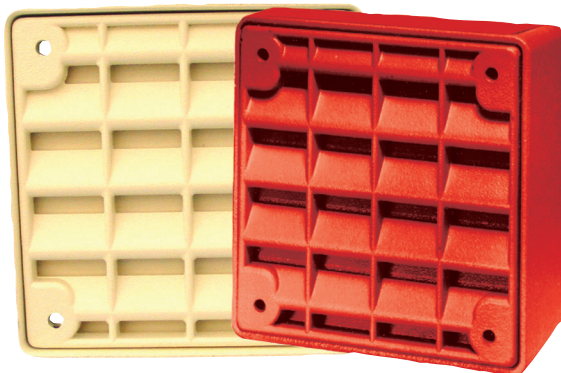

- ▶ 25 VRMS or 70 VRMS operation up to 8 W
- ▶ Low average current draw
- ▶ Extra protection and improved audibility with sealed-back speaker construction and vandal-resistant grill
- ▶ Compatible with SM and DSM Synchronization Modules
- ▶ Easy wiring with screw terminals

The Wheelock ET-1010 Speakers meet the critical needs of the life safety industry for voice and tone signaling in both indoor and outdoor applications. They have a vandal-resistant die-cast grill and a sealed-back speaker for extra protection. The high-efficiency speaker is designed for maximum output at a minimum wattage across a frequency range of 400 Hz to 4 kHz. It covers both 25 V and 75 V audio systems with a series of wattage taps from 0.125 W to 8 W.

Certifications and approvals

Cooper Wheelock, Inc. holds these Listings and Approvals:

Region	Certification
USA	UL UUMW: Speakers and Amplifiers for Fire Protective Signaling Systems (UL1480, UL1711, and UL2043)
	CSFM see our website

Installation/configuration notes

Compatible Products

The following products are compatible with the ET-1010 Speakers:

Category	Product ID	Product Description
Control Panels	D7022 ¹	Conventional FACP
	D7024 ²	Addressable FACP
	D7024	Conventional FACP
	D8024 ¹	Analog FACP
	D9124 ¹	Addressable FACP
	D10024A ¹	Analog FACP
	FPD-7024 ²	Addressable FACP
Modules	FPD-7024	Conventional FACP
	SM-12/24-R	Synchronization module (red)
	DSM-12/24-R	Dual synchronization module (red)

These speakers are compatible with Wheelock SAFEPATH4 Facility Communication Systems and Bosch Voice Evacuation Systems.

¹ For synchronization, use the SM or DSM modules with these control panels. The synchronization module must be set for 24 V operation. When used, the D7022 must be set for 24 VDC operation.

² When used with a D7039 Multiplex Expansion Module, the D7024 and FPD-7024 become addressable fire alarm control panels (FACPs).

Mounting

These speakers mount on the indicated back boxes for the indicated applications:

	Conduit Applications	Surface Mounted	Flush Mounted
Four-inch square*			•
SBB Back Box	•	•	

* Requires an SER extension ring.

Wiring

The input terminals accept wires with diameters between 18 AWG and 12 AWG (ISO 0.75 mm² and 4 mm²).

Parts included

Quant.	Component
1	Speaker
1	Hardware pack
1	Literature pack

Technical specifications**Electrical**

Voltage (Input):	24 VDC nominal; 16 VDC or FWR to 33 VDC or FWR
------------------	---

Environmental

Relative Humidity:	Up to 95%, non-condensing
Temperature (Operating):	-31°F to +150°F (-35°C to +66°C)

Mechanical

Dimensions:	4.375 in. square x 4.125 in. deep ¹ (11.1 cm square x 10.5 cm deep ¹)
Material:	Die-cast, high-impact plastic

¹ When used in flush-mount installations, the unit extends 1.9375 in. (4.9 cm) from the mounting surface.

Speaker dB at 10 ft (3 m)

1/8 W	78 dB
1/4 W	81 dB
1/2 W	84 dB
1 W	87 dB
2 W	89 dB
4 W	93 dB
8 W	96 dB

Ordering information**ET-1010-R Vandal-Resistant Speaker (red)**

Red, vandal-resistant, 24 VDC device providing dual voltage capability (25 VRMS or 70 VRMS), and field-selectable taps from 1/8 W to 8 W
Order number **ET-1010-R**

ET-1010-W Vandal-Resistant Speaker (white)

White, vandal-resistant, 24 VDC device providing dual voltage capability (25 VRMS or 70 VRMS), and field-selectable taps from 1/8 W to 8 W
Order number **ET-1010-W**

Accessories**SBB-R Surface-mount Back Box (red)**

14 cm (5.5 in.) x 14.2 cm (5.6 in.) x 9.1 cm (3.6 in.)
Order number **SBB-R**

SBB-W Surface-mount Back Box (white)

14 cm (5.5 in.) x 14.2 cm (5.6 in.) x 9.1 cm (3.6 in.)
Order number **SBB-W**

SFP-R Semi-flush Plate (red)

15.2 cm (6 in.) square by 0.8 cm (0.3125 in.) thick
Order number **SFP-R**

SSB-4 Ceiling Support Bridge

60.3 cm (23.75 in.) long by 16.5 cm (6.5 in.) wide
Order number **SSB-4**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com