




12 in/out AT 2000 extension

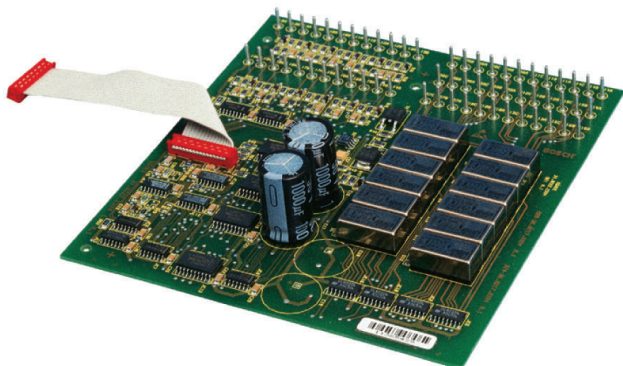

For extending inputs and outputs for the AT 2000 transmission devices with 12 input lines (DC primary lines) and 12 outputs (relay contacts).

Technical Specifications

Terminal resistance of the primary line	10 kilohm \pm 1%
Activation time	> 200 ms
Load on switch contacts	
• Max. output	30 W/60 VA (Ohm resistive load)
• Max. voltage	50 V

Ordering Information

12 in/out AT 2000 extension

ITS-AT1210

For extending the AT 2000 with 12 additional inputs (input lines) and 12 outputs (relay contacts)

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Bosch Security Systems Pte Ltd
38C Jalan Pemimpin
Singapore 577180
Phone: +65 6319 3450
Fax: +65 6319 3499
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by