

## PRA-CSBK Call station kit, basic

### PRAESENSA



The basic call station kit is an open frame call station to create dedicated full custom operator panels for PRAESENSA Public Address and Voice Alarm systems. It has the same functionality as the PRA-CSLW, but without LCD user interface to facilitate easier mounting in operator desks or in wall-mounted fireman's panel enclosures.

It comes with a hand-held supervised omni-directional microphone for close talking with press-to-talk button and a small monitor loudspeaker.

The kit has a CAN-bus interface on RJ12 to a PRA-CSEK Call station extension kit for connection of selection switches and status indicator LEDs, or to connect to a full custom control board with switches and indicators. The interface is compatible with the PRA-CSE and one to four of these devices can be connected.

The kit only requires a connection to an OMNEO IP-network with Power over Ethernet (PoE) for communication and power supply combined. It can be configured as business and emergency call station. The PRA-CSBK is considered a component that must be installed in a final product. The final product must be reconfirmed to meet applicable EMC directives.

#### Functions

##### IP-network connection

- Direct connection to the IP-network. One shielded CAT5e cable is sufficient for Power over Ethernet, audio and control.
- For dual redundancy of network and power connection, a second shielded CAT5e cable can be connected.

- ▶ Basic open frame call station for custom call panel solutions without LCD
- ▶ Supervised hand-held microphone with helix cable and loudspeaker included
- ▶ CAN-interface for selection switches and status indicators
- ▶ Connections for power LED and status LEDs
- ▶ Dual OMNEO IP-network connection and redundant Power over Ethernet

- Integrated network switch with two OMNEO ports allows for loop-through connections to adjacent devices (at least one must provide PoE). Rapid Spanning Tree Protocol (RSTP) is supported to enable recovery from failing network links.

##### Business operation


- Press-to-talk switch on hand-held microphone. Without call station extension panels connected, the press-to-talk switch can be used to make calls to a pre-configured set of zones.
- Fixed level monitor loudspeaker.
- Local audio line input (with stereo to mono conversion) for connecting an external audio source. The audio channel will be available on the network and can be played in any loudspeaker zone.
- CAN-bus interface with power supply on RJ12 connector for connection to a full custom user interface board with selection switches and status indicator LEDs. This connection can also be used for up to four cascaded PRA-CSE Call station extension panels or a PRA-CSEK Call station extension kit (availability to be announced).

##### Emergency operation

- The basic call station kit fully complies to the standards for voice alarm applications when configured correctly in combination with one or more call station extensions or a custom user interface panel. The PRA-CSBK is considered a component that must be installed in a final product. The final product must be reconfirmed to meet applicable voice alarm standards, or must be certified.


- Each of the two RJ45 network connectors accept PoE to power the call station. This provides fail-safe network connection redundancy, as one connection is sufficient for full operation.
- Supervision of all critical elements; the audio path is supervised, as well as the communication to the network.

### Connection and functional diagram

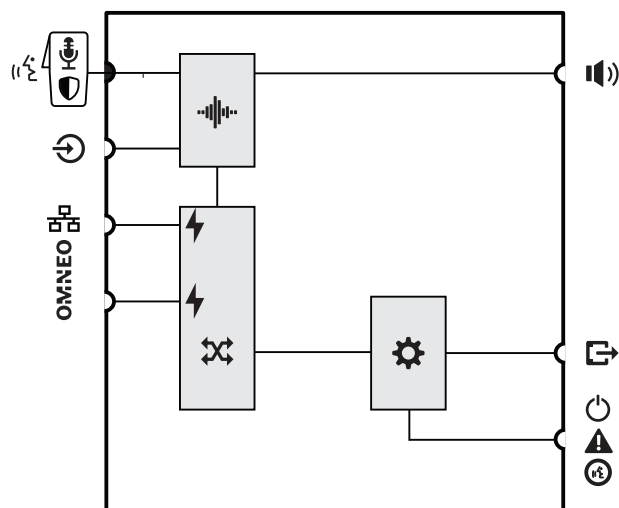

	Supervised hand-held microphone with Press-To-Talk switch		Audio processing (DSP)
	Power over Ethernet		OMNEO network switch
	Controller		

### Top-side

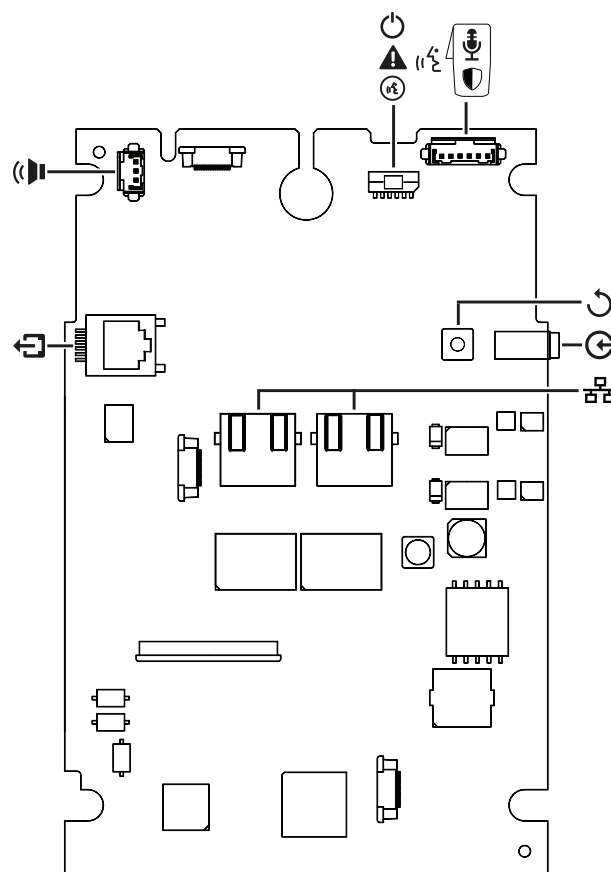

### Top-side indicators

	100 Mbps network 1-2 1 Gbps network 1-2	Yellow Green
--	--	-----------------















### External indicators

	<b>Power on</b> <b>Device in identification mode</b>	<b>Green</b> <b>Green blinking</b>
	System fault present	Yellow
	Status business call Microphone active Chime/message active	Green Green blinking
	Status emergency call Microphone active Alarm tone/message active	Red Red blinking
	Identification mode / Indicator test	All LEDs blink



### Top-side controls

	Device reset (to factory default)	Button
--	-----------------------------------	--------

### Top-side interconnections

	Network port 1-2 (PoE PD)	
	Microphone with Press-To-Talk switch	
	Local source audio line input	
	Monitor loudspeaker	
	PRA-CSE interconnection (RJ12)	
  	LED indicators for power, system fault and call/ microphone status	

### External components

	Microphone with Press-To-Talk switch	Included
	Monitor loudspeaker	Included

### Architects' and engineers' specifications

The IP-networked call station kit shall be designed exclusively for use with Bosch PRAESENSA systems. The call station kit shall provide an interface for control data and multi-channel digital audio over OMNEO using dual Ethernet ports for redundant network connection, supporting RSTP and loop-through cabling. It shall receive Power over Ethernet (PoE) via either one or both network connections. The call station kit shall have a CAN-bus to interface with call station extensions or a custom built user interface panel for zone selection and other purposes. It shall provide control and routing of live speech calls, stored messages and music with volume control per zone. The call station kit shall have a hand-held omnidirectional microphone for live calls and a 3.5 mm jack line level input for background music, and provide software-configurable signal processing including sensitivity control, parametric equalization and limiting. The call station kit shall be marked for CE, and be compliant with the RoHS directive. Warranty shall be three years minimum. The call station kit shall be a Bosch PRA-CSBK.

### Regulatory information

#### Regulatory areas

Environment	EN/IEC 63000
-------------	--------------

#### Parts included

Quantity	Component
1	Call station circuit board
1	Microphone with coiled cable and cable feedthrough
1	Grommet lock for microphone cable feedthrough
1	Miniature loudspeaker
1	Interconnection cable for loudspeaker
1	Interconnection cable for indicators
1	Interconnection cable for extension
1	Set of mounting studs and grommets
4	Self-tapping screw (3 x10 mm TX10)
1	Microphone clip
1	Quick Installation Guide

### Technical specifications

#### Electrical

Microphone	
Nominal acoustic input level (dB SPL) (configurable)	89 dB SPL – 109 dB SPL
Maximum acoustic input level (dB SPL)	120 dB SPL
Minimum signal-to-noise ratio (dBA)	73 dBA
Polar pattern	Omnidirectional
Frequency response (-3 dB) (Hz) (+3 / -6 dB)	500 Hz – 8,000 Hz (noise cancelling)

#### Monitor loudspeaker

Maximum sound pressure level at a distance of 1 m (dB)	75 dB
Volume notification buzzer (dB)	0 dB
Volume message monitoring (dB)	-20 dB

Frequency range (-10 dB) (Hz)	400 Hz – 100,000 Hz
-------------------------------	---------------------

**Line input**

Minimum signal-to-noise ratio (dBA)	96 dBA
Total harmonic distortion + noise (%)	.10%

**Power transfer**

PoE nominal voltage (VDC)	48 VDC
Wi-Fi standard	IEEE 802.3af
Power consumption (W) (Call station business use)	3.2 W
Power consumption (W) (Call station emergency use)	4.40 W
Power consumption (W) (Call station extension through RJ12)	5 W
Input voltage (VDC)	37 VDC – 57 VDC

**Supervision**

Microphone	Impedance
Audio path	Pilot tone
Press-to-talk switch	Impedance
Controller continuity	Watchdog
PoE (1-2)	Voltage

**Network interface**

Ethernet type	100BASE-TX; 1000BASE-T
Protection	RSTP
Protocols / standards	TCP/IP; OMNEO
Latency (ms)	10 ms
Audio encryption	AES 128
Encryption	TLS 1.0

Number of Ethernet ports	2
Mean time between failures (MTBF) (h) (extrapolated from calculated MTBF of PRA-CSLD and PRA-CSLW)	10,000,000 h

**Environmental**

Operating temperature (°C)	-5 °C – 45 °C
Operating temperature (°F)	23 °F – 122 °F
Storage temperature (°C)	-30 °C – 70 °C
Storage temperature (°F)	-22 °F – 158 °F
Transportation temperature (°C)	-30 °C – 70 °C
Transportation temperature (°F)	-22 °F – 158 °F
Operating relative humidity, non-condensing (%)	5% – 95%
Air pressure (hPa)	560 hPa – 1,070 hPa
Installation altitude (m)	-500 m – 1,070 m
Installation altitude (ft)	-1,640 ft – 16,404 ft

**Operation vibration**

Amplitude	< 0.35 mm
Acceleration	< 5 G
Transport bump	< 10 G

**Mechanical**

Dimensions (H x W x D) (mm)	20 mm x 110 mm x 162 mm
Dimensions (H x W x D) (in)	.8 in x 4.3 in x 6.4 in
Weight (g)	120 g
Weight (lb) (excluding accessories)	.26 lb

**Ordering information****PRA-CSBK Call station kit, basic**

Network connected, PoE powered, with hand-held microphone.

Order number **PRA-CSBK | F.01U.389.020**

**Represented by:**

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
[www.boschsecurity.com/xc/en/contact/](http://www.boschsecurity.com/xc/en/contact/)  
[www.boschsecurity.com](http://www.boschsecurity.com)

**Germany:**  
Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Ring 5  
85630 Grasbrunn  
Tel.: +49 (0)89 6290 0  
Fax: +49 (0)89 6290 1020  
[de.securitysystems@bosch.com](mailto:de.securitysystems@bosch.com)  
[www.boschsecurity.com](http://www.boschsecurity.com)

**North America:**  
Bosch Security Systems, LLC  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
[onlinehelp@us.bosch.com](mailto:onlinehelp@us.bosch.com)  
[www.boschsecurity.com](http://www.boschsecurity.com)

**Asia-Pacific:**  
Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
[www.boschsecurity.com/xc/en/contact/](http://www.boschsecurity.com/xc/en/contact/)  
[www.boschsecurity.com](http://www.boschsecurity.com)