


# RSSWP Weatherproof Strobes

www.boschsecurity.com



**BOSCH**  
Invented for life

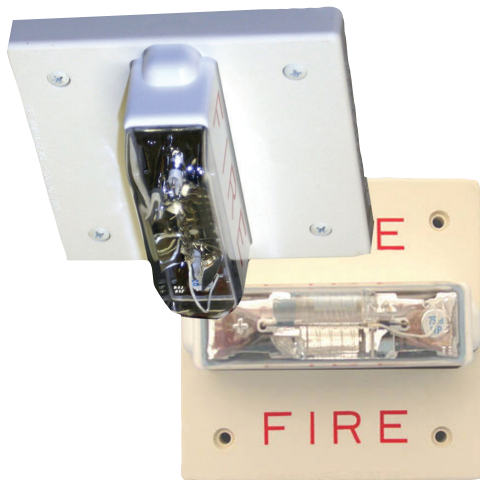

- ▶ 24 VDC, filtered or FWR
- ▶ Wall or ceiling mount models
- ▶ Synchronize with SM and DSM modules
- ▶ Cost-efficient two-wire operation with low profile design
- ▶ ADA, NFPA, ANSI compliant

The Wheelock RSSWP Weatherproof Strobe family consists of 24 V, two-wire, square strobes for use with a WPSBB-R Weatherproof Back Box in outdoor and extreme environment applications. The series provides wall or ceiling mount models with strobes listed as 75 cd on axis at -31°F (-35°C). Synchronize these strobes with the SM (single) or DSM (dual) modules or a compatible control panel.

National Fire Protection Association (NFPA 72)  
Occupational Safety and Health Administration (OSHA 29 Part 1910.165)



**Notice**

These products are **not** suitable for hearing-impaired outdoor applications.

Region	Certification	
USA	UL	UVAV: Visual-signal Appliances for Fire-protective Signaling Systems (ANSI/UL 1638) and UUKC: Signaling Appliances and Equipment for the Hearing Impaired (ANSI/UL 1971)
	FM	RSSWP
	CSFM	see our website

## Certifications and approvals

Wheelock, Inc. holds these Listings and Approvals that apply to the wall mount models only:

Listings and Approvals: NYC/MEA (151-92-E)

Complies with: Americans with Disabilities Act (ADA)  
American National Standards Institute (ANSI 117.1)

## Installation/configuration notes

### Compatible Products

The following products are compatible with the RSSWP Weatherproof Strobes:

Category	Product ID	Product Description
Control Panels	D7022 <sup>1</sup>	Conventional FACP
	D7024 <sup>2</sup>	Addressable FACP
	D7024	Conventional FACP

	D8024 <sup>1</sup>	Analog FACP
	D9124 <sup>1</sup>	Addressable FACP
	D10024A <sup>1</sup>	Analog FACP
	FPD-7024 <sup>2,3</sup>	
	FPD-7024 <sup>3</sup>	
	FPA-1000 <sup>3</sup>	
Modules	SM-12/24-R	Synchronization module (red)
	DSM-12/24-R	Dual synchronization module (red)

<sup>1</sup> For synchronization, use an SM or DSM module with these control panels. The synchronization module must be set for 24 V operation. When used, the D7022 must be set for 24 VDC operation.

<sup>2</sup> When used with a D7039 Multiplex Expansion Module, the FPD-7024 and D7024 become addressable fire alarm control panels (FACPs).

<sup>3</sup> Wall-mount models only.

### Mounting Considerations

#### Outdoor or Severe Environment Applications

For an outdoor or severe environment (NEMA 3R) application, mount the strobe in a WPSBB-R Weatherproof Back Box on a flat wall or ceiling so the entire rear surface of the back box is covered. The drain holes in the back box must point toward the ground. The knockouts on the rear surface of the back box must remain intact.

The knockout hole on top of the back box is sized for a half-inch conduit and matching connector. Use a proper watertight conduit fitting.

Mount these strobes on the indicated back box for the indicated applications:

	Conduit Applications	Surface Mounted	Flush Mounted
--	----------------------	-----------------	---------------

WPSBB-R

•

•

Each device comes supplied with a beauty plate for an attractive finish.

### Wiring



#### Notice

Do not use these units in coded or pulsed signaling circuits.

The input terminals accept wires with diameters between 18 AWG and 12 AWG (ISO 0.75 mm<sup>2</sup> and 4 mm<sup>2</sup>).

### Parts included

Quant.	Component
1	Strobe
1	Mounting Plate

1 Hardware pack

1 Literature pack

### Technical specifications

#### Electrical

##### Current (maximum RMS)

VDC: 138 mA

V FWR: 222 mA

##### Voltage (input)

Nominal: 24 VDC

Range: 16.0 to 33.0 VDC or FWR

#### Environmental

Relative humidity: Up to 95%, non-condensing

Temperature (operating): -31°F to +150°F (-35°C to +66°C)

#### Mechanical

Dimensions (H x W x D): 4.75 in. x 4.75 in. x 2.6875 in. (12.1 cm x 12.1 cm x 6.8 cm)

Material: Molded plastic enclosure incorporating a Xenon flashtube and Lexan lens.

Candela Ratings (on axis): 75 cd at -31°F (-35°C)  
180 cd at +77°F (+25°C)

#### Trademarks

All hardware and software product names used in this document are likely to be registered trademarks and must be treated accordingly.

### Ordering information

#### RSSWP-2475W-FR Wall-mount Weatherproof Strobe (red)

Red, 24 VDC, square wall-mount weatherproof strobe providing 75 cd of light output  
Order number **RSSWP-2475W-FR**

#### RSSWP-2475C-FR Ceiling-mount Weatherproof Strobe (red)

Red, 24 VDC, square ceiling-mount weatherproof strobe providing 75 cd of light output  
Order number **RSSWP-2475C-FR**

#### RSSWP-2475C-FW Ceiling-mount Weatherproof Strobe (white)

White, 24 VDC, square ceiling-mount weatherproof strobe providing 75 cd of light output  
Order number **RSSWP-2475C-FW**

---

**Accessories**

**DSM-12/24-R Dual Synchronization Module (red)**

A 12/24 VDC Cooper Wheelock module that synchronizes notification appliances on a single Class A or two Class B circuits.

Order number **DSM-12/24-R**

---

**SM-12/24-R Single Synchronization Module (red)**

A 12/24 VDC Cooper Wheelock module that synchronizes notification appliances on Class B alarm circuits.

**Not Available.**

Order number **SM-12/24-R**

---

**WPSBB-R Weatherproof Back Box (red)**

Used to surface mount the RSSWP Series Weatherproof Horn-strobes for outdoor or severe environment applications

Order number **WPSBB-R**

---

**Represented by:**

**Americas:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**America Latina:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
latam.boschsecurity@bosch.com  
www.boschsecurity.com