

## LHD-UM40X-IN Horn loudspeaker driver with LMT, 40W



The LHD-UM40X-IN is a 40 W line-matching transformer to be used with a horn loudspeaker driver unit suitable for 100 V public address applications.

This driver unit can be installed along with 22-inch and 18-inch horn waveguides (supplied separately). 1-3/8 inch, 18 threads per inch screw thread is used for mounting the driver into the horns.

The horn loudspeakers are ideal for outdoor applications, such as:

- Addressing election rallies
- Cultural and religious gathering
- Places of worship
- Schools and colleges
- Car parking areas
- Sport venues and playgrounds
- Tradeshows and exhibitions
- Industrial complexes.

### System overview

The LHD-UM40X-IN driver unit has a rated power of 40 W with a line matching transformer to support 100 V line PA operation.

The driver unit has multiple power tapping options. Each core of the multicore cable attached to the driver unit represents a different tapping level. 1-3/8 inch, 18 threads per inch screw thread is used for mounting the drivers into the horns.

The driver unit is attached to the circular horn using the screw threads on the driver unit. The top and bottom parts of the driver assembly are held together with four screws and the rubber gaskets.

- ▶ 40 W driver unit with line matching transformer.
- ▶ Excellent speech reproduction.
- ▶ Water- and dust-protected according to IP65.
- ▶ Simple power tapping through color-coded cables.
- ▶ Anodized fasteners employed for product longevity.

The threads on top of the driver and the rubber gasket in the horn driver housing prevent water and dust from entering the unit.

The driver unit has an ABS plastic cap with the Bosch logo that needs to be removed during the assembly of the driver unit and the horn.

A protective mesh near the opening prevents small particles and insects from entering the unit.

The housing is made of aluminum, which avoids corrosion due to outdoor environment. The entire horn loudspeaker assembly has an IP65-certified protection.

### Regulatory information


All Bosch loudspeakers are designed to withstand operation at their rated power for 100 hours, in accordance with IEC 60268-1 and IEC 60268-5 Power Handling Capacity (PHC) standards. This ensures improved reliability under extreme conditions, leading to higher customer satisfaction and longer operating life. It also minimizes the chance of failure or performance deterioration.

### Installation/configuration notes


The driver unit can be configured to work at four different power taps. The driver units comes attached with four core cables with a length of 1 meter. The driver unit can safely attach to the horn waveguide, using the screw threads.

Each master package includes 10 driver units. As such, this product needs to be ordered in multiples of 10.



**Dimensions (mm)**

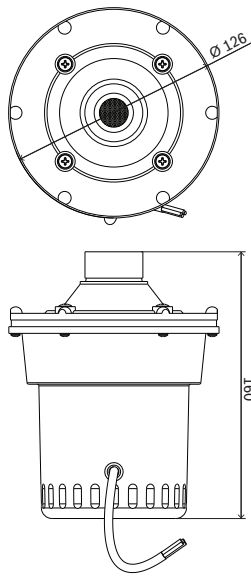

**Frequency response (Hz)**

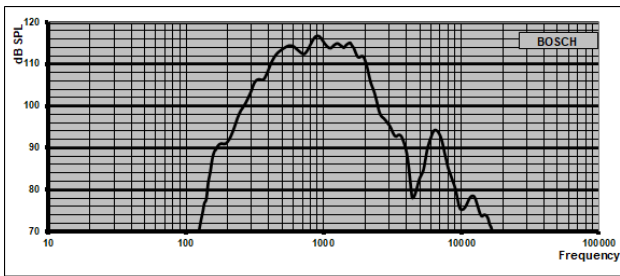

**Polar plots (Hz)**

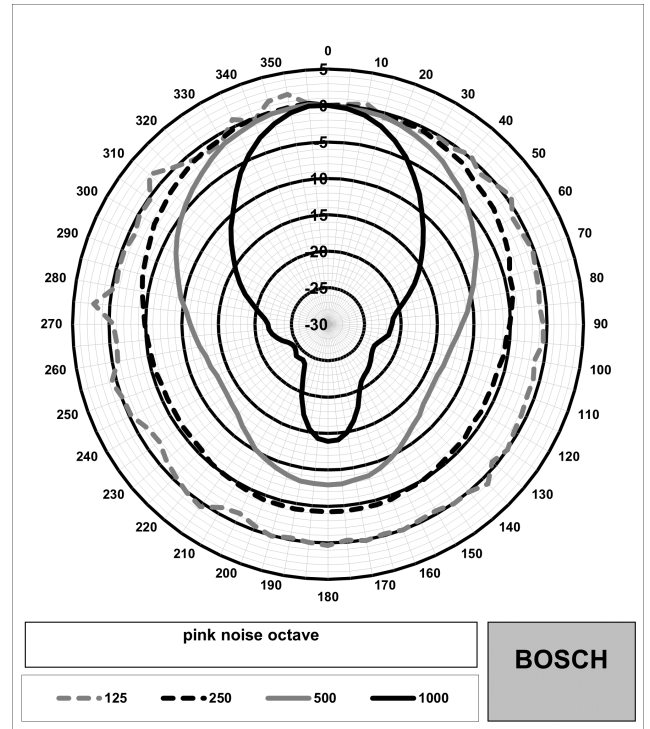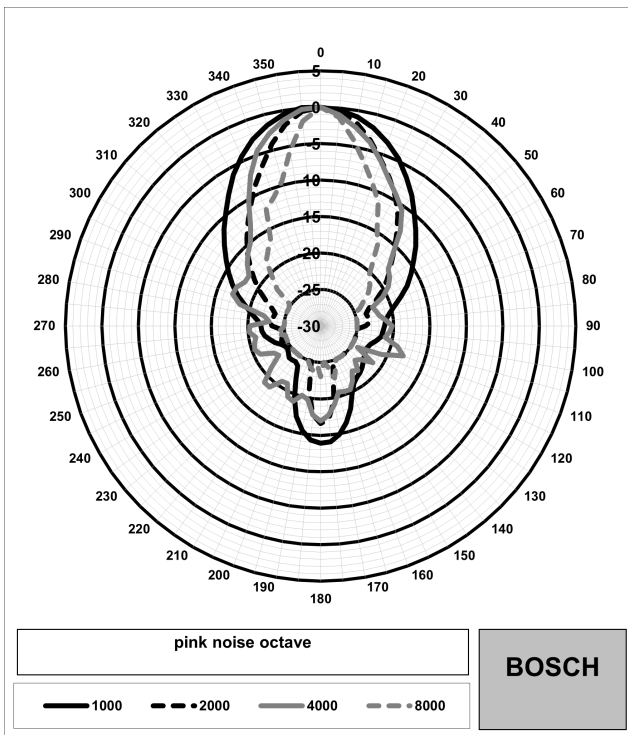

**Parts included**

Quantity	Component
10	LHD-UM40X-IN Horn loudspeaker driver with LMT, 40W
10	Quick installation guide

**Technical specifications**

<b>Acoustic</b>	
Frequency range (-10 dB) (Hz)	350 Hz – 3,500 Hz
Sound pressure level (1 W / rated power, 1 m, 1 kHz octave) (dB) with 18-inch horn	116 dB / 132 dB
Sound pressure level (1 W / rated power, 1 m, 1 kHz octave) (dB) with 22-inch horn	118 dB / 134 dB

<b>Electrical</b>	
Maximum power (W)	60 W
Rated power (W)	40 W
Input voltage (V)	70 V / 100 V
Power tapping (W)	40 W / 20 W / 10 W
Nominal impedance (Ω)	250 Ω

## Environmental

Operating temperature (°C)	-10 °C – 60 °C
Storage temperature (°C)	-10 °C – 65 °C
Relative humidity	< 95 %
IP rating	IP65

## Mechanical

Dimensions (mm)	160 mm x 126 mm
Weight (kg) (without horn)	2.30 kg
Color (RAL)	RAL 7035 Light gray

## Ordering information

### LHD-UM40X-IN Horn loudspeaker driver with LMT, 40W

Horn loudspeaker driver with LMT, 40 W.

Order number **LHD-UM40X-IN | F.01U.403.340**

#### Represented by:

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
[www.boschsecurity.com/xc/en/contact/](http://www.boschsecurity.com/xc/en/contact/)  
[www.boschsecurity.com](http://www.boschsecurity.com)

**Germany:**  
Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Platz 1  
D-70839 Gerlingen  
[www.boschsecurity.com](http://www.boschsecurity.com)

**North America:**  
Bosch Security Systems, LLC  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
[www.boschsecurity.com](http://www.boschsecurity.com)

**Asia-Pacific:**  
Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
[www.boschsecurity.com/xc/en/contact/](http://www.boschsecurity.com/xc/en/contact/)  
[www.boschsecurity.com](http://www.boschsecurity.com)