



RADION universal transmitter
RFUN/RFUN-A

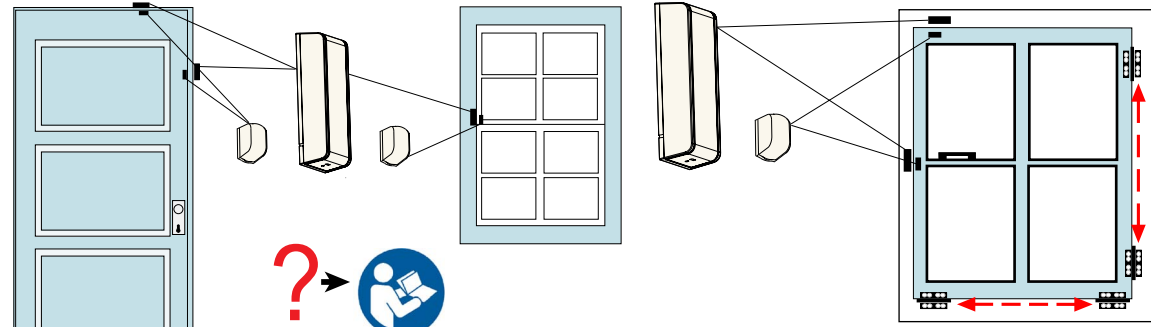

Installation Manual

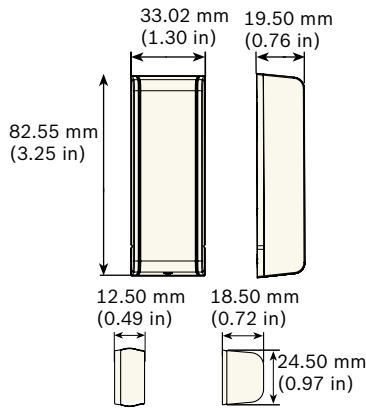

P/N: F.01U.261.834 - B810
P/N: F.01U.261.835 - RFRC-OPT
P/N: F.01U.304.662 - Transmitter

UL - only model RFUN-A is evaluated by UL

- UL1023: Standard for Household Burglar-Alarm System Units
- UL1076: Standard for Proprietary Burglar Alarm Units and Systems
- UL1610: Standard for Central-Station Burglar-Alarm Units
- UL365: Standard for Police Connected Burglar Alarm Units and System
- UL609: Standard for Local Burglar Alarm Units and Systems
- UL636: Standard for Holdup Alarm Units and Systems
- FCC, Part 15

Industry Canada (IC)
Classified to ANSI/SIA CP01-2010

INCERT
B-509-0073. RFUN only



H116003. RFUN only


Bosch YouTube Channel:




EN
EN 50131-3
EN 50131-5-3
EN 50131-2-6
Grade 2
Environment Class II



NFA2P
AFNOR: www.marque-nf.com
CNPP: www.cnpp.com
NF324-H58
Certificate number 2120200020
RTC 50131-2-6
Autosurveillance à l'ouverture








0 - 93% Non-condensing humidity




Functional range: -10°C to +55°C (+14°F to +131°F)
UL only: 0°C to +49°C (+32°F to +120°F)
EN 50130-5 Class II: -10°C to +55°C (+14°F to +131°F)
IP30/IK04

1 **2** **3** **4** **5**

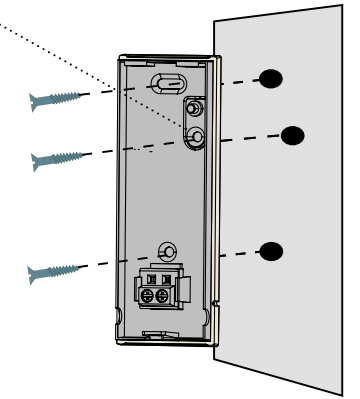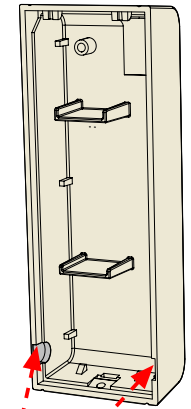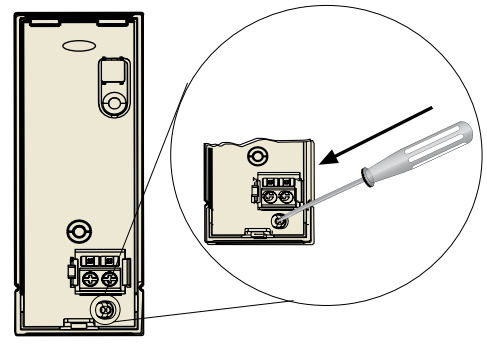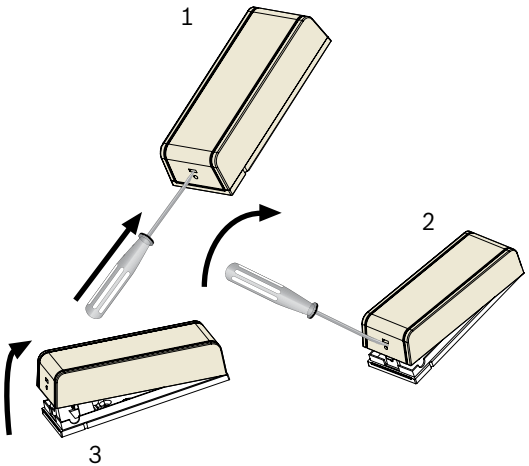


6

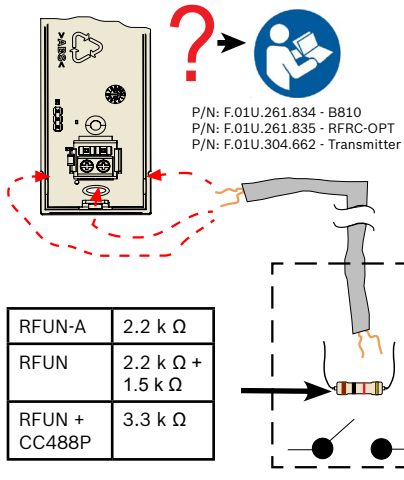


P/N: F.01U.261.834 - B810
P/N: F.01U.261.835 - RFRC-OPT
P/N: F.01U.304.662 - Transmitter

7

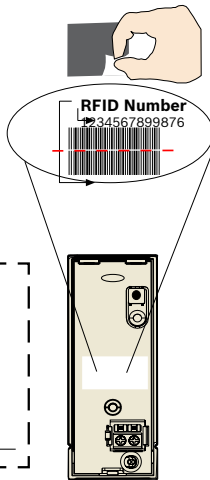


RFID Number
34567899876

8

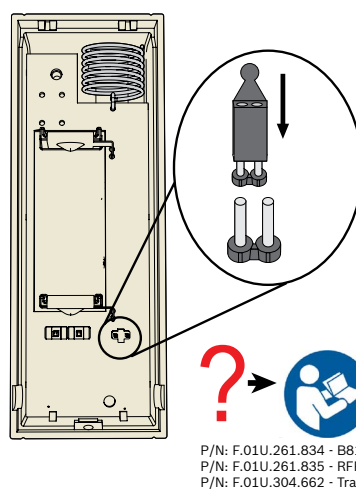


P/N: F.01U.261.834 - B810
P/N: F.01U.261.835 - RFRC-OPT
P/N: F.01U.304.662 - Transmitter

9

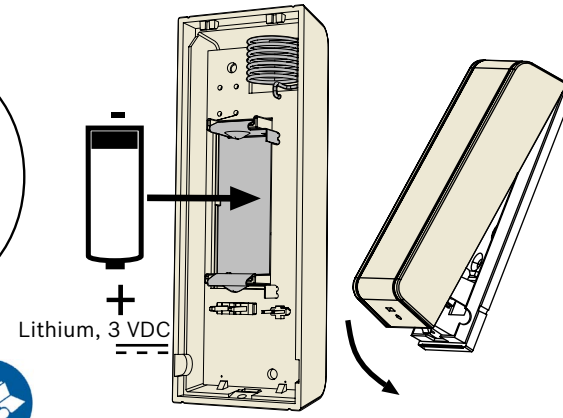


Lithium, 3 VDC

10

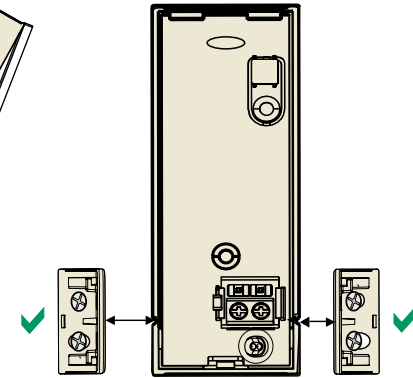


11

12

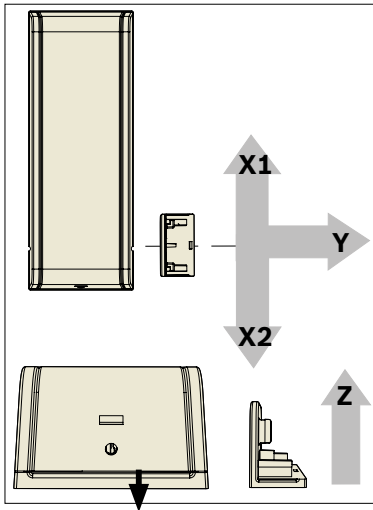


	Y	14.5 ± 1.5 mm (0.57 ± 0.06 in)
	X1	14.5 ± 3.5 mm (0.57 ± 0.14 in)
	X2	15.5 ± 3.5 mm (0.61 ± 0.14 in)
	Z	22.0 ± 4.0 mm (0.87 ± 0.16 in)
	Y	15.0 ± 4.0 mm (0.59 ± 0.16 in)
	X1	14.0 ± 4.0 mm (0.55 ± 0.16 in)
	X2	14.5 ± 4.5 mm (0.57 ± 0.18 in)
Z	24.0 ± 3.0 mm (0.94 ± 0.12 in)	

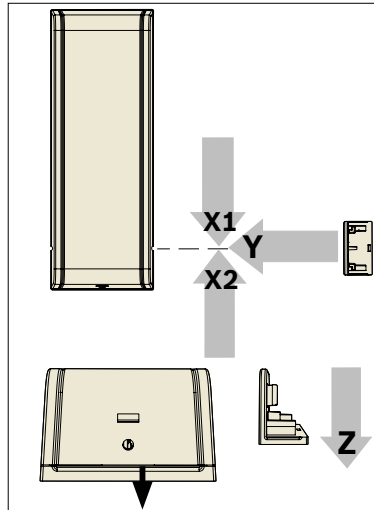


	Y	12.5 ± 1.5 mm (0.49 ± 0.06 in)
	X1	13.5 ± 3.5 mm (0.53 ± 0.14 in)
	X2	14.5 ± 3.5 mm (0.57 ± 0.14 in)
	Z	20.0 ± 4.0 mm (0.79 ± 0.16 in)
	Y	13.5 ± 4.5 mm (0.53 ± 0.18 in)
	X1	13.0 ± 4.0 mm (0.51 ± 0.16 in)
	X2	13.5 ± 4.5 mm (0.53 ± 0.18 in)
Z	22.5 ± 3.5 mm (0.89 ± 0.14 in)	

13

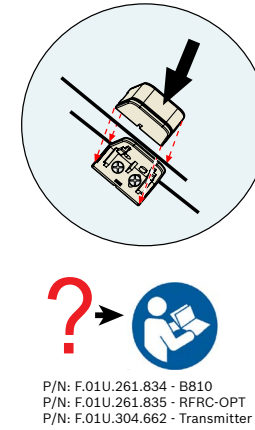


P/N: F.01U.261.834 - B810
P/N: F.01U.261.835 - RFRC-OPT
P/N: F.01U.304.662 - Transmitter

14

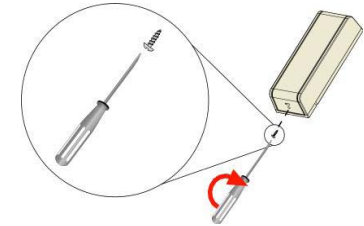

15



P/N: F.01U.261.834 - B810
P/N: F.01U.261.835 - RFRC-OPT
P/N: F.01U.304.662 - Transmitter

Copyright

This document is the intellectual property of Bosch Security Systems, Inc. and is protected by copyright. All rights reserved.

Trademarks

All hardware and software product names used in this document are likely to be registered trademarks and must be treated accordingly.

Determine Bosch Security Systems, Inc. Product

Manufacturing Dates

Use the serial number located on the product label and refer to the Bosch Security Systems, Inc web site at: <http://www.boschsecurity.com/datecodes/>.

