

# SKA-100L-LSN Bolt contact, outdoor, LSN

www.boschsecurity.com



**BOSCH**  
Invented for life



- ▶ Bolt contact in LSN technology
- ▶ For connecting to a LSN intrusion control panel
- ▶ VdS class C
- ▶ LSN perimeter protection

Bolt contacts are used for monitoring the closure of doors.

## Certifications and approvals

Region	Regulatory compliance/quality marks
Germany	VdS G120039 SKI-100L-LSN, SKA-100L-LSN

## Installation/configuration notes

### Installation considerations

- Installation is carried out in the door bolt with the bolt contact being activated by the tongue of the lock. It should be kept in mind that only the second turn of the key in the lock actually activates the contact. To make any necessary adjustments, the bolt contact's operating spring lever can be bent.
- When installing in fire protection doors, please ensure that no mechanical changes, except for the fastener bores, are carried out on the door frames.

### Connecting LSN contacts

- Each LSN contact is a physical LSN element (1 out of 127 possible per loop).


- The length of LSN contact connection cables must be included when planning the total line length of the LSN loop, as LSN technology is incorporated in these detectors.
- Passive coupling elements for joining the connection cables to the installation cable must be placed as close as possible to the LSN contacts. The 1 m connection cable with 2 m LSN cable length is included in the calculation of the LSN cable length (LSN is carried into the contacts and back out again).
- Connector boxes (optional) are classified as installation material.

### Local Security Network LSN

In case of wire breakage/short circuit all LSN – elements in the LSN Ring remain under observation. In this case, the system automatically builds two transmission lines which undertake the observation from both sides to the defective location.

### Testing LSN contacts

- Reed switch and microswitch functions can be checked before installation by a high-Ohm multimeter or continuity checker (for diode paths).
- The resistance values are approximate values; a large change in resistance is significant here.

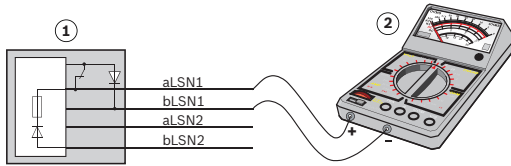

- 1 Detector
- 2 High-Ohm multimeter  
Contact open: approx. 3 megaohm  
Contact closed: approx. 1 megaohm

Only the intrusion contact can be checked in this way. The tamper switch of the Class C magnetic contact can be checked by the LSN control panel or with the LSN testing device (software version 3.x onward).

### Parts included

Quantity	Component
1	Bolt contact for perimeter doors, with cable

### Technical specifications

#### Electric

Operating voltage	15 VDC - 33 VDC
Current consumption	0,4 mA

### Mechanical

Type of installation	Flush
Material	Steel plate
Color	Gray
Dimensions (without operating lever)	37 mm x 9 mm x 19 mm
Dimensions (with operating lever)	74 mm x 10 mm x 19 mm
Connection cable	Ø 3,2 mm x 4 m
Wire colors	aLSN1: green; bLSN1: brown; aLSN2: green; bLSN2: yellow

### Environmental

VdS environmental class	III
Protective system	IP 67
Permitted ambient temperature	-25° C - 70° C

### Ordering information

**SKA-100L-LSN Bolt contact, outdoor, LSN**  
LSN bolt contact for outdoor use.  
Order number **SKA-100L-LSN**

#### Represented by:

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
emea.securitysystems@bosch.com  
emea.boschsecurity.com

**Germany:**  
Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Ring 5  
85630 Grasbrunn  
Germany  
www.boschsecurity.com

**North America:**  
Bosch Security Systems, LLC  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
onlinehelp@us.bosch.com  
www.boschsecurity.us

**Asia-Pacific:**  
Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia