

Solution 6000 Product Matrix



BOSCH

Invented for life

Any one of the IP modules shown on the right can be installed. IP via Wi-Fi is available when the Wi-Fi keypad is used.

P/N - CM747B
Plug On 4G LTE CAT1
Module with Magnetic
Base Antenna



or

P/N - CM369B
IP Communications Module
4G LTE CAT1 / Ethernet




or

P/N - CM751B
Plug On Ethernet
IP Module




P/N - CM101B
Interactive Voice
Control Module



x1

x1



P/N - CC610PB
Solution 6000 Security
Controller PCB

P/N - SW500B
Upload/Download
Software (V2.11 or higher)



NOW ON USB STICK



P/N - SW501B
Site Manager
Onsite Administration Software
(IP Ethernet Connectivity Required)

Panel supports direct
RFRC-STR2 serial
connection or via
CM195.



RFRC-STR2
Receiver
Directly
Connected

x1

RFRC Radion Repeater also available.
**Note: Repeater is not compatible
with 2 Way SMART RF**

P/N - CM710B
4 Way LAN Relay
Output Expander
Module



x8

P/N - CM720B
1AMP LAN Power
Supply & Battery
Charger Module



x8

P/N - RF120
SMART RF LAN Base
Station Receiver 2-Way

x4



P/N - RF110
SMART RF - 5 Button
2-Way Keyfob



P/N - RF110FK
Colour Fascia Kit To
Suit RF110 Keyfobs

P/N - CP155B
External Keypad with
Smart Card Reader



P/N - CP156B
Slim Style External Keypad
with Smart Card Reader



P/N - HCT-4UL
4 Button Premium
Keyfob



P/N - RFKF-TBS / RFKF-
FBS2 or 4 Button
Wireless Remote with
Encryption
**Only supported on
RFRC-STR2**



P/N - RFPB-SB / RFPB-TB
1 or 2 Button Panic

SMART DEVICE APPS



SMS Control



SMS Reports



iFob Control

Smart device apps are available to enhance alarm reporting and provide real time control of system areas, outputs and doors etc. More information can be found in the app stores or on the MyAlarm web site at www.myalarm.com.au.



SMART CARD CREDENTIALS AND LAN READERS

P/N - PR365
Adhesive Smart Card Sticker



P/N - PR301
Smart Card Token with Keyring



P/N - PR370
Dual Smart Card and
EM Format Token



P/N - PR350
ISO Smart Card



External
Smart Card Reader
P/N - PR116B White
P/N - PR115B Black



Internal
Smart Card Reader
P/N - PR114B White
P/N - PR113B Black



3.5" Colour Keypad with
Internal Smart Card Reader
P/N - CP736B



Up to 16 keypad devices of any type can be installed on the Solution 6000 panel. This includes Keypads, Readers and Weigand to LAN Interfaces.



3.5" Colour Keypad
With S/C + Wi-Fi
+ Tamper
P/N - CP737B


* Images for illustrative purposes only.

Solution 6000 Product Matrix




BOSCH

Invented for life

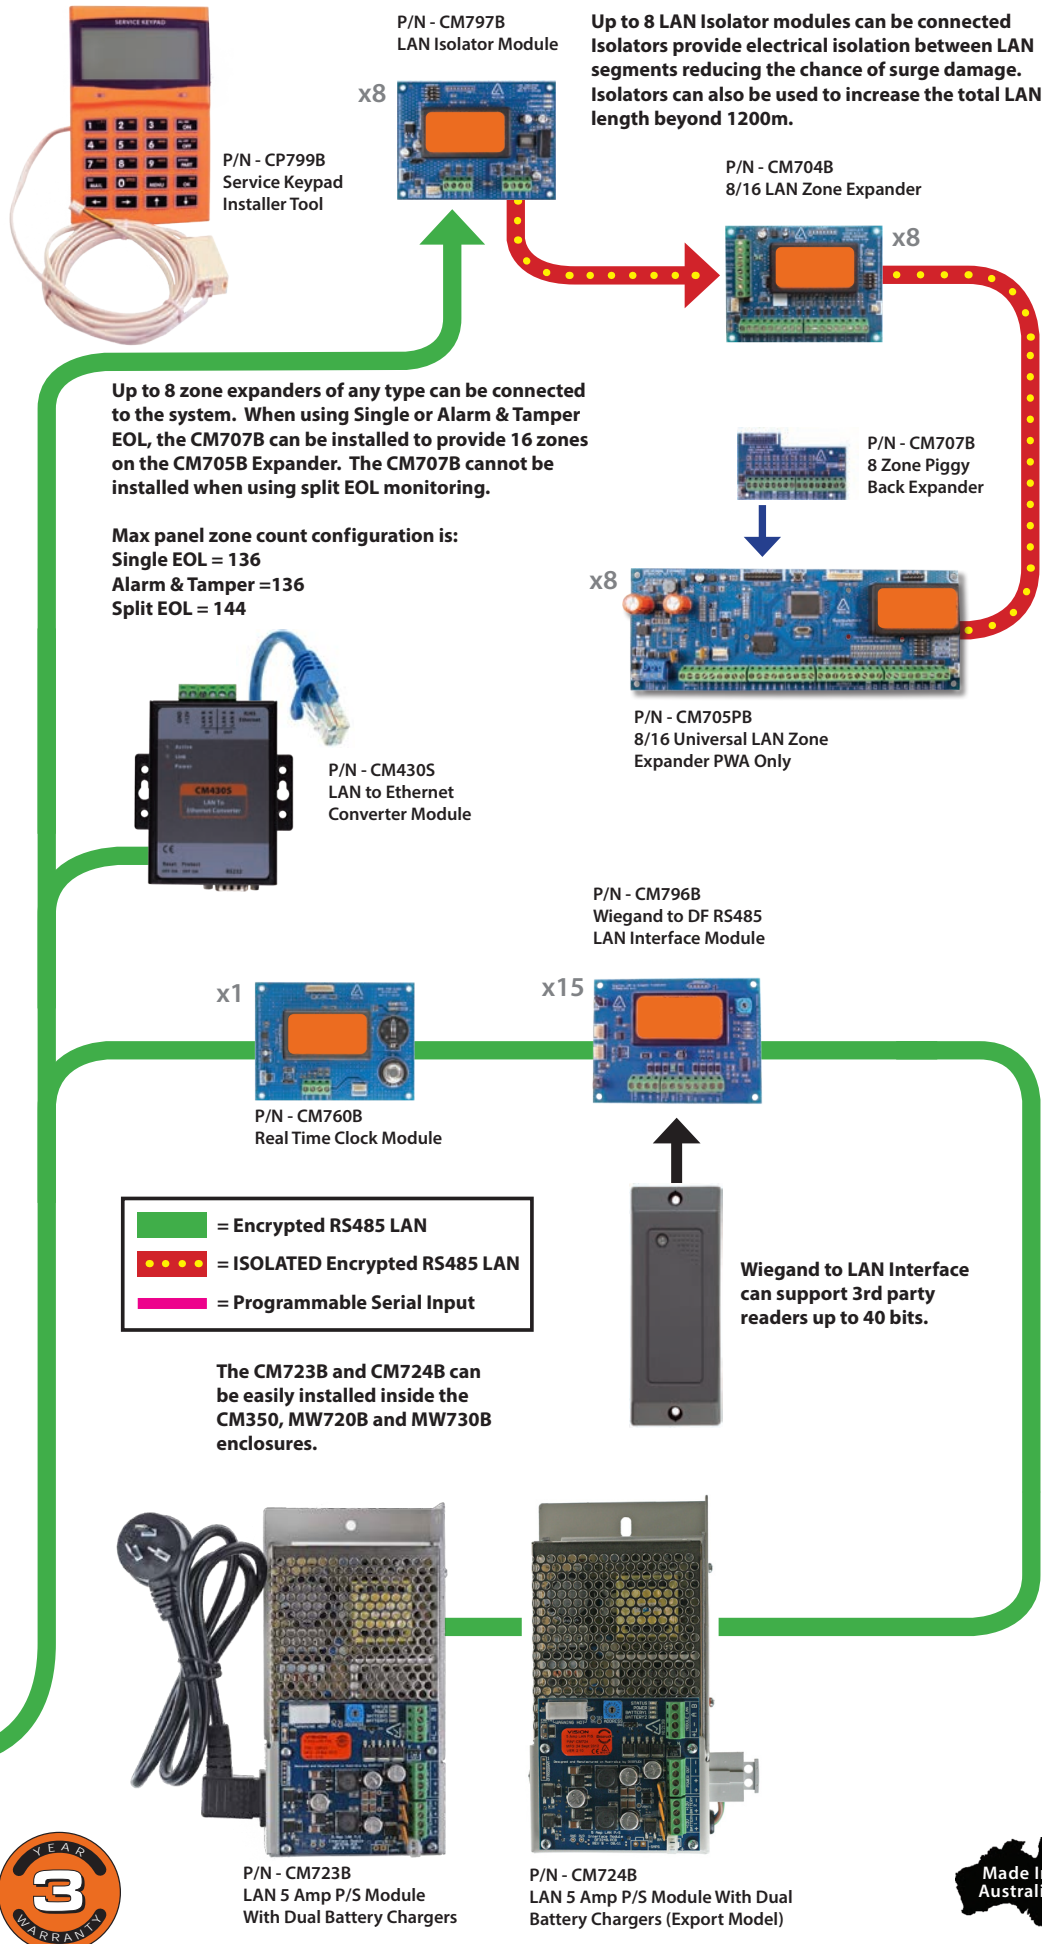


P/N - CM910B
Combined Direct Link \Flash
Programmer Interface - USB



P/N - CM435B
Power Terminal
Expander Module



P/N - CM444B-10PC
Slim Style Relay
Card Form C-2 Amp
10 pcs



P/N - CM940B
6 Way Programmable Relay Card.
Can be separated into single relay cards.



P/N - CM255B
Panel Default Unlock Key
Will reset Installer PIN and
RAS PIN on Solution 6000
panels.



P/N - CM436B
Desktop Reader Interface For 3rd
party Wiegand Readers.
No Reader supplied.

P/N - CM438B
USB powered Desktop Reader
Interface for DF format EM Prox
tokens.

P/N - CM439B
USB powered Desktop Reader
Interface for DF MiFare Smart Card
tokens.

Desktop readers are for use with
Solutionlink and Site Manager
Software packages and allow user
credentials to be learnt at the PC.

Bosch Security Systems Pty Ltd
For more information please visit
www.boschsecurity.com.au

© Bosch Security Systems 2023
Modifications Reserved
Printed in Australia

