


Video Recording Manager

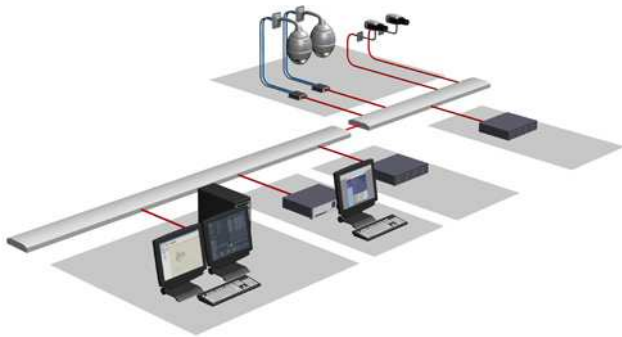

- ▶ Distributed storage and configurable load balancing
- ▶ iSCSI disk array failover for extra reliability
- ▶ Used with all Bosch video-over-IP cameras and encoders
- ▶ Configuration support for all Bosch disk arrays (DSA E-Series and DIVAR IP systems)
- ▶ Integration of 3rd party cameras (ONVIF, RTSP, JPEG)

Video Recording Manager by Bosch provides a distributed network video recorder solution, eliminating the need for dedicated network video recorders (NVRs) and signaling the second generation of IP network video recording. The software supports iSCSI-based storage systems and Bosch video-over-IP devices (IP cameras and IP video encoders). Video Recording Manager provides load balancing and failover for the iSCSI storage system and makes it easy to add additional iSCSI storage systems later on. Video Recording Manager introduces the concept of a storage virtualization layer. This abstraction layer enables the software to manage all of the individual disk arrays in the entire system as various “virtual” pools of storage, which are intelligently allocated as needed.

Video Recording Manager eliminates the need for classic NVRs and their associated server hardware, operating systems, and anti-virus software, as well as the ongoing software patches and updates these systems require.

This new NVR technology makes installation, operation, and maintenance much easier while reducing the total cost of ownership.

System overview

Video Recording Manager comprises:

- VRM Server including VRM Monitor
- Configuration Manager
- VRM eXport Wizard

The central recording management service (VRM Server) runs as a service on Microsoft Windows platforms. Bosch recommends running the software on a dedicated server/hardware platform.

Video Recording Manager offers system-wide recording, monitoring, and management of Bosch iSCSI storage, video encoders, and cameras. Video Recording Manager software supports H.264, H.265, and MPEG-4 IP video devices from Bosch, including all encoders and cameras. With the Video Streaming Gateway it also supports 3rd party cameras supporting either ONVIF, RTSP or JPEG protocol.

Supported storage subsystems include the Bosch iSCSI-based disk array systems DSA E-Series and DIVAR IP. The iSCSI disk arrays can be attached anywhere on a standard IP network. With the Video Recording Manager eXport Wizard, a large amount of data can be exported.

Optimal performance

Video Recording Manager offers a high-performance, flexible, scalable, and a highly reliable iSCSI storage management solution.

Optimized performance is obtained by the use of intelligent addressing on a block level, which also allows for load balancing of the video recording to all available storage blocks located on any storage array in the system.

Load balancing is provided with respect to the bandwidth and the number of iSCSI connections and is configurable per IP address (iSCSI target).

Recording encryption

The Video Recording Manager offers an option to encrypt video recordings including metadata. This payload encryption is based on certificates without the need to increase your bandwidth.

Logical virtualization

The Video Recording Manager virtualization layer allows the scalability of storage beyond the physical limits of a single storage subsystem. This logical abstraction layer means that each camera can use any storage space it actually needs, rather than an allocated, arbitrary, discrete chunk ahead of time. Adjust retention times of video data as required.

Fast recording retrieval

Video Recording Manager provides fast and flexible retrieval via a search database of recordings and metadata. Metadata is a form of data that describes other data such as events, ATM/POS information, and video content analysis data. The metadata is recorded with the video data and provides a fast and efficient way for the search engine, in the playback client, to quickly locate specified video clips. The database also keeps track of the location of recording blocks. If this database is lost, Video Recording Manager can recreate the database by reading the stored metadata, thus providing a self-healing capability.

Distributed storage

Video Recording Manager not only provides for redundant management of metadata, it also introduces a significant enhancement of overall reliability and availability. By providing redundancy for storage provisioning and a failover design for the central recording management service, there is no single point of failure. In addition, unlike classic NVR systems, Video Recording Manager scales without requiring additional PCs. This greatly reduces the risk of system failures.

Functions

VRM Server

VRM Server, with the central recording management service, maintains a database containing the recording source information and a list of associated iSCSI drives. The central monitoring includes a web-based user interface for status monitoring. This provides system status overview and recording status information.

Configuration Manager

The Configuration Manager software allows for central configuration of the network storage subsystems, recordings (including schedules), data rate, frame rate, stream, and privileges, as well as for managing user accounts.

For more information about Configuration Manager, see the product specific documentation.

Playback client

For replay use BVMS and Video Security Client (VSC). The software is available in the Bosch product catalog. For more information about BVMS and Video Security Client see the product specific documentation.

Integration of 3rd party cameras

Video Recording Manager together with Video Streaming Gateway offers the option to integrate cameras that support ONVIF, standard RTSP or JPEG protocols. Video Streaming Gateway is intended for live viewing and Video Recording Manager iSCSI based recording of cameras in low bandwidth environments or of 3rd party cameras supporting one of the above mentioned protocols.

Export of data through Video Recording Manager

The backup functionality to export larger amounts of data has been moved to the Video Recording Manager eXport Wizard application. eXport Wizard is a stand-alone application.

The playback of exported data is possible without a Video Recording Manager environment and is currently supported by BVMS Operator Client. For technical details and additional replay options, please refer to the latest release letters for VRM and BVMS available in the Bosch product catalog.

Design recommendations

Video Recording Manager only supports the following recording preferences:

- Automatic
 - In this mode Video Recording Manager automatically uses the storage properties bandwidth and iSCSI connectivity to equally distribute the load within the Video Recording Manager system. This mode may be configured in a redundant or in a capacity oriented (no explicit redundancy) setup.
- Failover
 - Manual assignment of a primary and an optional secondary iSCSI target. The primary and the optional secondary target must be located in one storage pool.

Installation/configuration notes

The Video Recording Manager can be configured and operated using several software packages.

- VRM Server (central recording management service) with web interface for VRM Monitor
- VRM Monitor
- Configuration Manager
- VRMeXport Wizard

VRM Server

One Video Recording Manager supports:

- 2048 channels
- 4 PB storage (net capacity)
- 120 iSCSI targets maximum (120 iSCSI targets are a hard limit)
- 254 LUNs per target

When planning for larger environments we strongly recommend using large sized disk arrays instead of a large number of small disk arrays (vertical scaling instead of horizontal scaling). iSCSI based storage systems not qualified by Bosch are not supported.

VRM Monitor

- Displays overall system status information, including uptime, bit rate, and retention times.
- Provides status information on recordings and storage.
- Offers detailed system log extraction for technical support.

Configuration Manager

- Allows configuration of the iSCSI storage subsystems
Bosch DSA E-Series (NetApp Storage Systems) and Bosch DIVAR IP and DLA systems (Bosch OEM disk arrays).
- Allows configuration of recording parameters, including schedules, data rates, frame rates, streams, and privileges.
- Allows management of users and groups with privileges and roles.
- Allows configuration of load balancing parameters (bandwidth and iSCSI connections) per disk array (IP address).

Technical specifications

System requirements

Operating system	Windows (Storage) Server 2012 R2 and later
Processor type	Intel Xeon E5 or later
Memory (RAM) (GB)	8 GB
CPU	Min. Six-Core Intel Xeon Processor E5-262v3 (2.4 GHz, 6-core, 15 MB, 85 W)
Network adapter	1 Gbps
Recommended Bosch server hardware	DL380 Gen10 Management Server (MHW-S380RA-SC)

Ordering information

MVM-BVRM-016 Base Package incl. 16 cameras single-pac

Video Recording Manager base package with a 16-camera license single-pack. VRM 2.0 licenses can be used.

Order number **MVM-BVRM-016 | F.01U.166.502**

MVM-SVRM-BAK Failover VRM License

Video Recording Manager Failover license. VRM 2.0 licenses can be used.

Order number **MVM-SVRM-BAK | F.01U.166.504**

MVM-XVRM-016 16 camera Upgrade License

Video Recording Manager upgrade license.

For 16 cameras.

Order number **MVM-XVRM-016 | F.01U.166.505**

MVM-XVRM-032 32 camera Upgrade License

Video Recording Manager upgrade license.

For 32 cameras.

Order number **MVM-XVRM-032 | F.01U.166.506**

MVM-XVRM-064 64 camera Upgrade License

Video Recording Manager upgrade license.

For 64 cameras.

Order number **MVM-XVRM-064 | F.01U.166.507**

MVM-XVRM-128 128 camera Upgrade License

Video Recording Manager upgrade license.

For 128 cameras.

Order number **MVM-XVRM-128 | F.01U.166.508**

MVM-XVRM-256 256 camera Upgrade License

Video Recording Manager upgrade license.

For 256 cameras.

Order number **MVM-XVRM-256 | F.01U.166.510**

MVM-XVRM-512 512 camera Upgrade License

Video Recording Manager upgrade license.

For 512 cameras.

Order number **MVM-XVRM-512 | F.01U.166.511**

MVM-XVRM-1024 1024 camera Upgrade License

Video Recording Manager upgrade license.

For 1024 cameras.

Order number **MVM-XVRM-1024 | F.01U.166.512**

MVM-XVRM-2048 2048 camera Upgrade License

Video Recording Manager upgrade license.

For 2048 cameras.

Order number **MVM-XVRM-2048 | F.01U.166.513**

DLA-XVRM-032 AIO - 32 camera Upgrade License

Video Recording Manager upgrade license for DIVAR IP.

For 32 cameras.

Order number **DLA-XVRM-032 | F.01U.170.699**

DLA-XVRM-064 AIO - 64 camera Upgrade License

Video Recording Manager upgrade license for DIVAR IP.

For 64 cameras.

Order number **DLA-XVRM-064 | F.01U.170.700**

MHW-S380RA-SC Standard Application Server

High-performance standard application management server.

American English

Order number **MHW-S380RA-SC | F.01U.385.087**

F.01U.348.445

Represented by:

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com

Germany:

Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Tel.: +49 (0)89 6290 0
Fax: +49 (0)89 6290 1020
de.securitysystems@bosch.com
www.boschsecurity.com

North America:

Bosch Security Systems, LLC
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com