




1 |

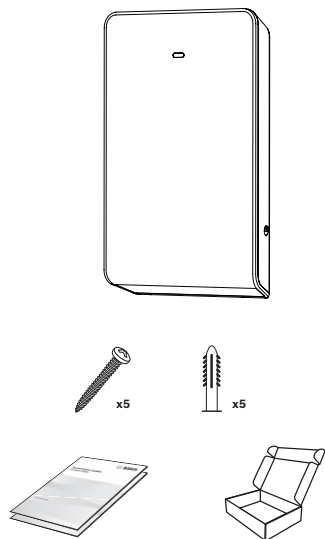


2 |

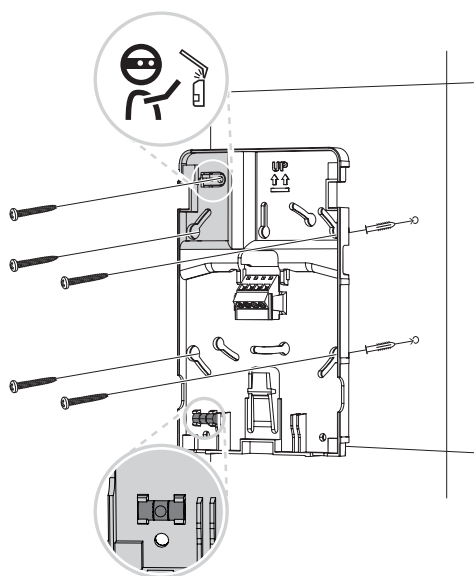


3 |

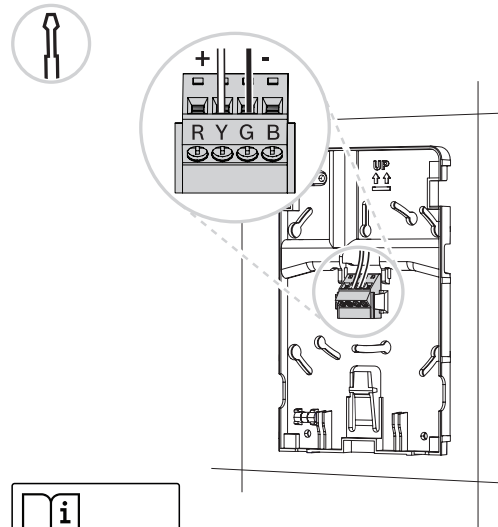


 **i**
 F.01U.261.834 - B810
 F.01U.352.258 - B810-CHI
 F.01U.261.835 - RFRC-OPT
 F.01U.261.836 - RFRC-OPT-CHI
 F.01U.304.538 - RFRC-STR


4 |

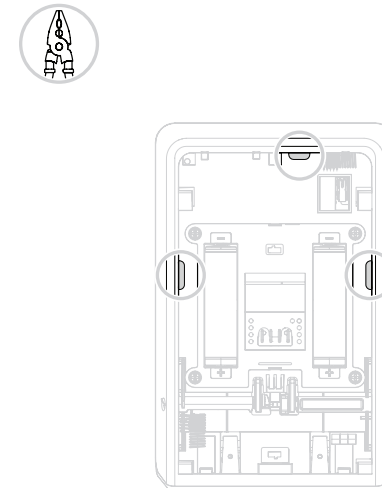


5 |

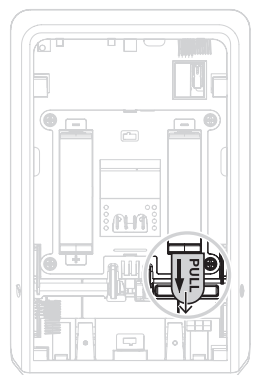


6 |

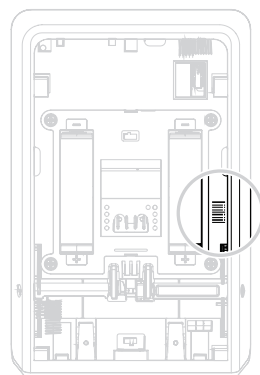



 **i**
 F.01U.261.834 - B810
 F.01U.352.258 - B810-CHI
 F.01U.261.835 - RFRC-OPT
 F.01U.261.836 - RFRC-OPT-CHI
 F.01U.304.538 - RFRC-STR


7 |


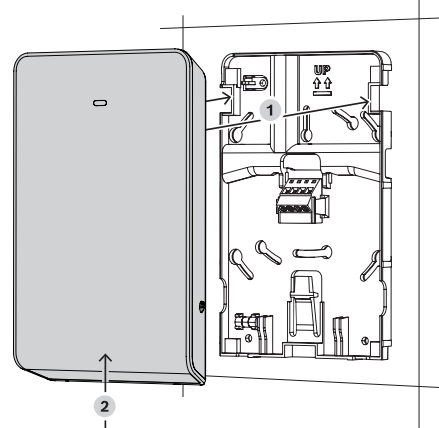


8 |

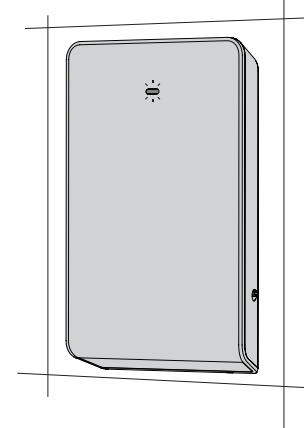

 **i**
 F.01U.261.834 - B810
 F.01U.352.258 - B810-CHI
 F.01U.261.835 - RFRC-OPT
 F.01U.261.836 - RFRC-OPT-CHI
 F.01U.304.538 - RFRC-STR

 **i**
 F.01U.261.834 - B810
 F.01U.352.258 - B810-CHI
 F.01U.261.835 - RFRC-OPT
 F.01U.261.836 - RFRC-OPT-CHI
 F.01U.304.538 - RFRC-STR

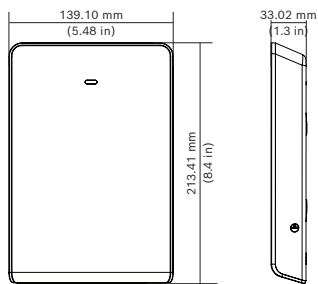

	WEEE Directive, Waste Electrical and Electronic Equipment, must be disposed of in accordance with local regulations
	IN DOOR USE ONLY
	3.6Vdc, 3180 mAh (Not user replaceable)
	433.42 MHz 10 mW maximum
	0 - 93% Non-condensing humidity
	Functional range: -10°C to +49°C (+14°F to +120°F) UL only: 0°C to +49°C (+32°F to +120°F)

RADION repeater

RFRP2-CHI



en Quick installation guide

Bosch Security Systems B.V.
 Torenaallee 49
 5617 BA Eindhoven
 Netherlands
www.boschsecurity.com
 © Bosch Security Systems B.V., 2021