

PRS-FMP-AT Fireman microphone panel

www.boschsecurity.com



BOSCH
Invented for life




- ▶ Fireman microphone panel according to ÖNORM F3033 for PRAESIDEO system
- ▶ Fault and status LED indication
- ▶ 7 buttons with LED indicators
- ▶ Handheld microphone

The fireman microphone panel includes a handheld microphone for fire alarm announcements. The side talk button of the microphone is non-latching and can be operated with gloves. The housing is non-flammable, has a viewing window and the front door can be locked using a key, in compliance with EN 54-11 (for manual call points). By pressing buttons 1-5, predefined alarm announcements stored in the electro-acoustic emergency system (ENS) can be called-up. When the hand microphone is picked up, ongoing announcements will stop. By pressing the microphone side talk button, an announcement can be made in all areas of the electro-acoustic emergency system (ENS).

System overview

The following indicators and controls are available:

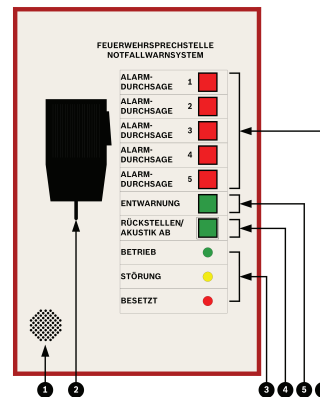

1. Buzzer
2. Handheld microphone
3. Status LED indicators
4. Acknowledge / reset
5. All-clear button
6. Alarm announcement buttons

The labeling of the optical display elements and operating elements are according to the ÖNORM F3033.

Certifications and approvals

Environmental directive compliance

Immunity	EN 50130-4
Emissions	EN 61000-6-3

Fire fighting equipment

Emergency system	ONORM F 3033
------------------	--------------

Conformity

Europe	CE
--------	----

Parts included

Quantity	Component
1	Fireman microphone panel
2	Door lock keys, in compliance with EN 54-11
1	Installation and operation manual
1	Safety instructions

Technical specifications

Electrical

Operating voltage	48 VDC
Current consumption	120 mA at 48 V

DC power input	Powered from PRAESIDEO PRS-CSI
Sensitivity (configurable)	81 to 96 dB SPL
Signal-to-noise ratio	≥60 dB

Environmental

Temperature	
Operating	-5 to +40°C
Storage and transport	-10 to +60°C

Mechanical

Dimensions (WxHxD)	200 x 300 x 110 mm
Case	
Material	Sheet steel
Color	Red (RAL 3000)
Weight	3.8 kg
Ingress protection	IP30 DIN 40050

Ordering information

PRS-FMP-AT Fireman microphone panel

Includes handheld microphone with coiled cable for emergency announcements.

Order number **PRS-FMP-AT**

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com

North America:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.us

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia